

# Series 43642 6x RCA Jack / Cinch Vertical


## Material

Base, insulator: ABS  
 Color washer: PBT + 15% glass fiber  
 Contact break / needle: H65 Brass / QSn 6.5-0.1

## Electrical

Rating: 0.2 Amp @ 50 VDC  
 Contact resistance: 30 mΩ max.  
 Insulator resistance: 100 MΩ min.  
 Dielectrical withstanding: 500 VAC/minute  
 Operating temperature: -40°C ~ +70°C  
 Durability: 500 cycles

43642A

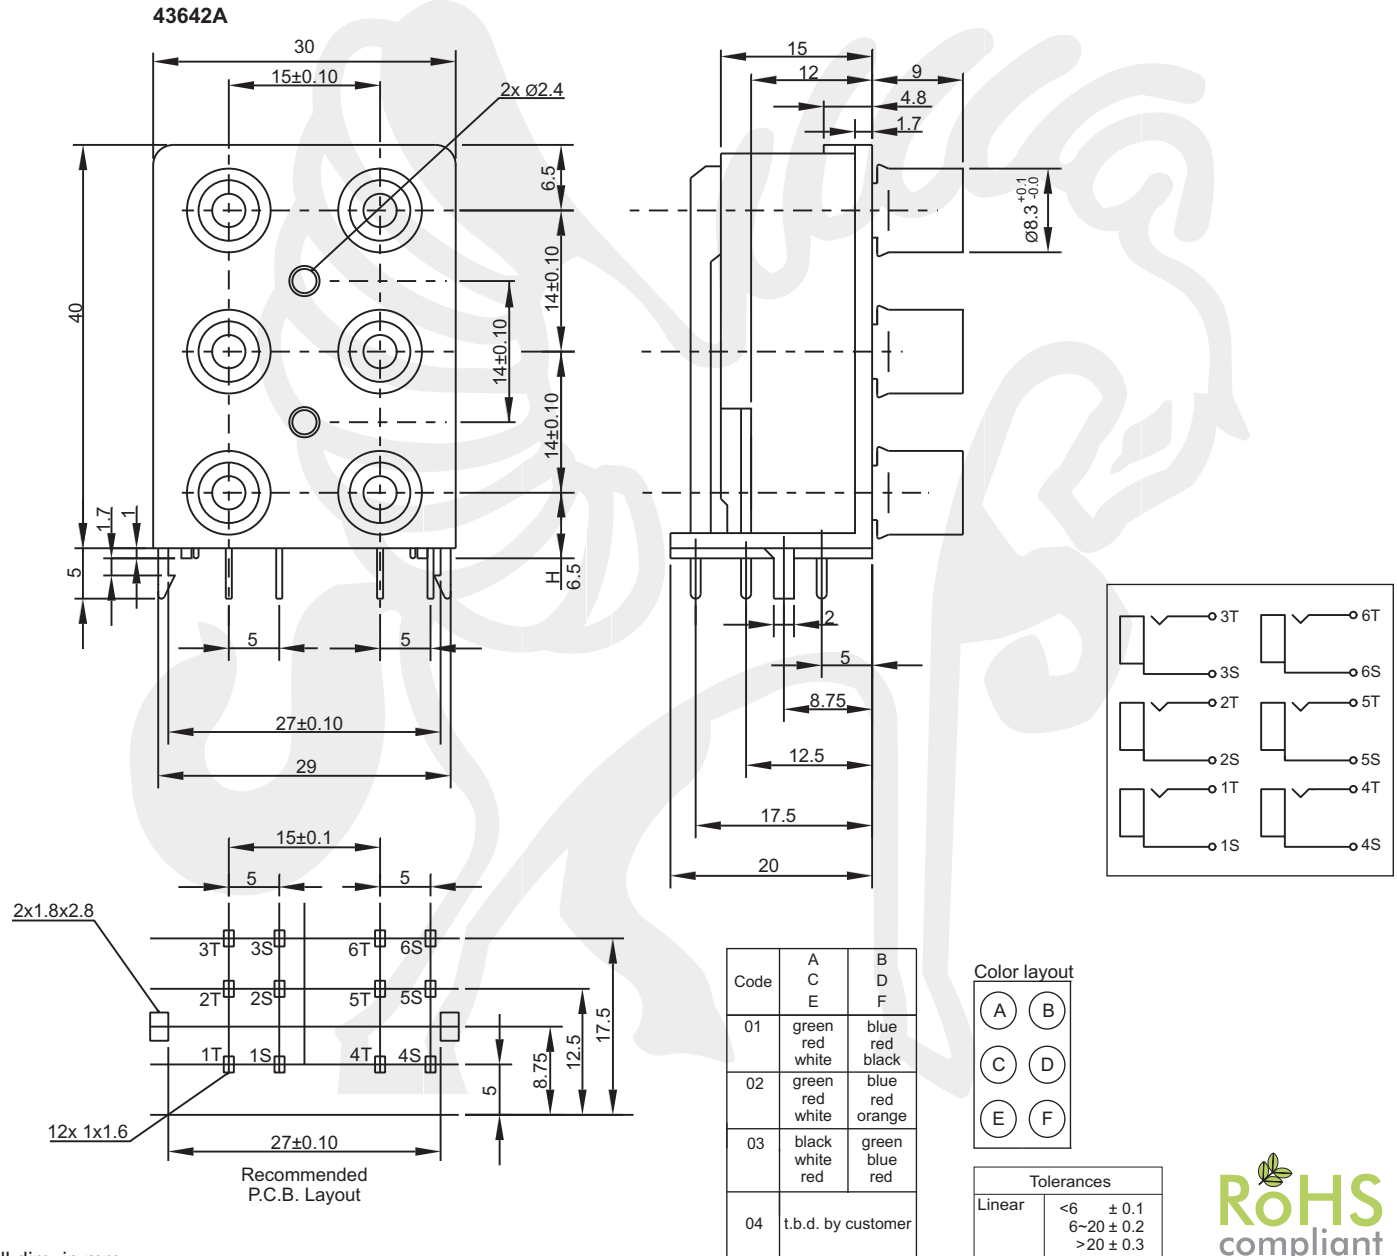

All dim. in mm

**43642 A**

**01**





Series  
 43642A  
 43642B with switch  
 43642C with switch  
 43642D

Color code  
 see table

Packing  
 Box

# Series 43642 6x RCA Jack / Cinch Vertical

43642B

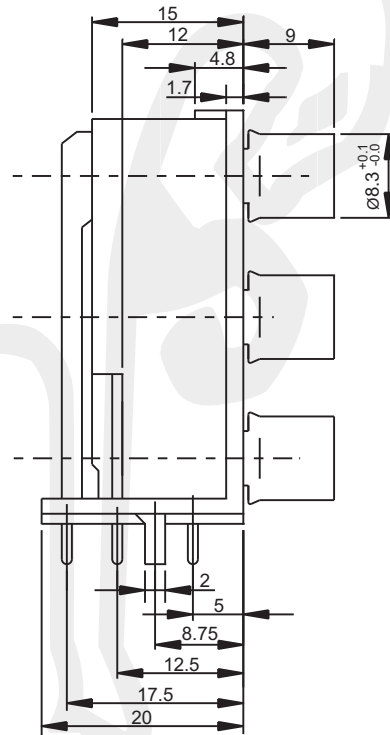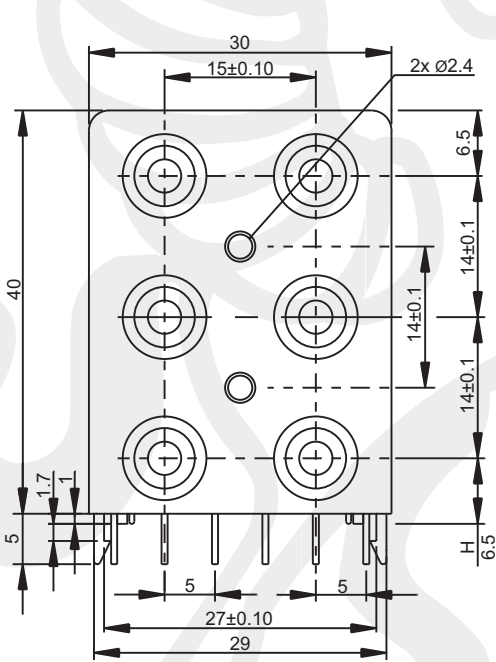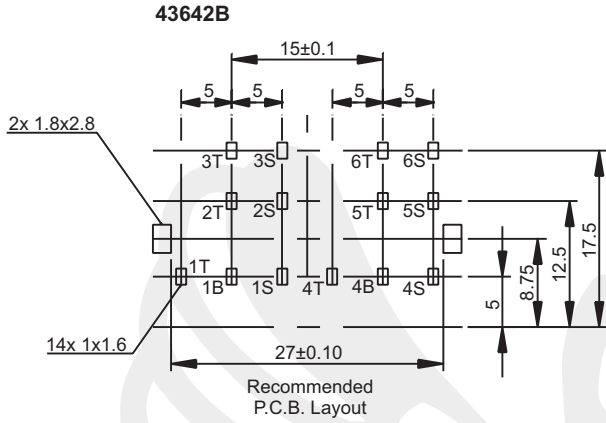





Tolerances	
Linear	<6 ± 0.1
	6~20 ± 0.2
	>20 ± 0.3



All dim. in mm

# Series 43642 6x RCA Jack / Cinch Vertical

43642C

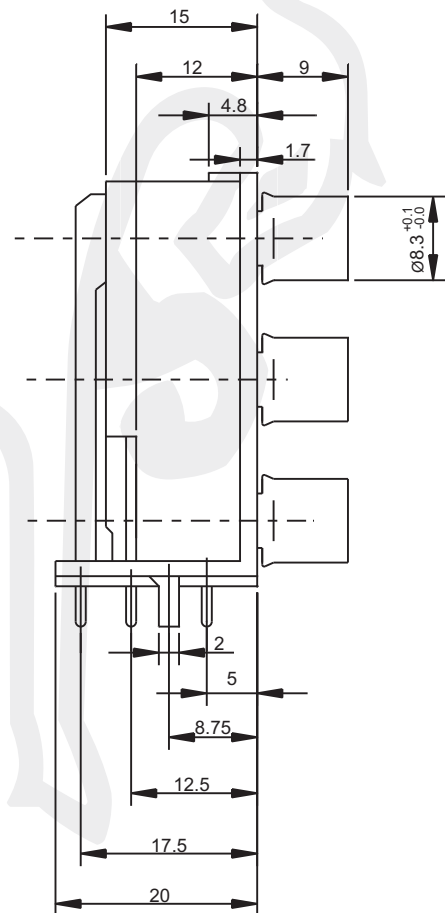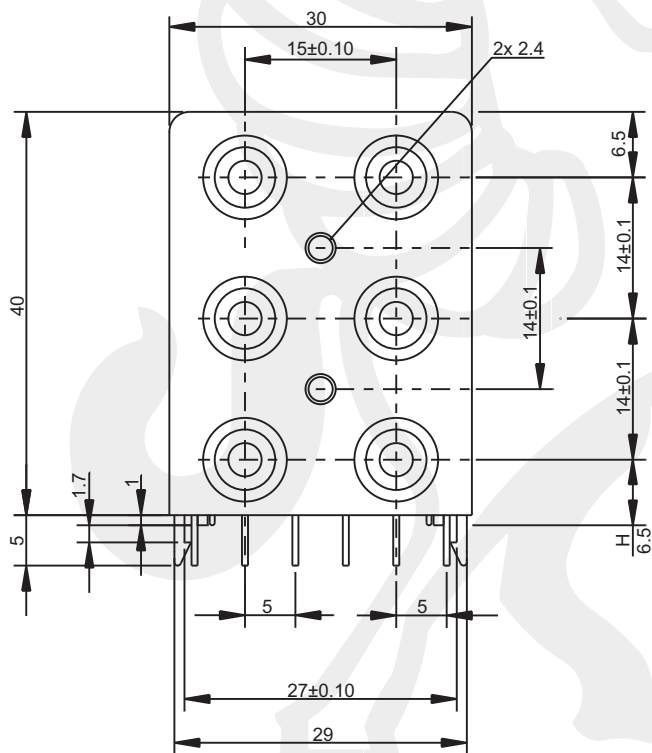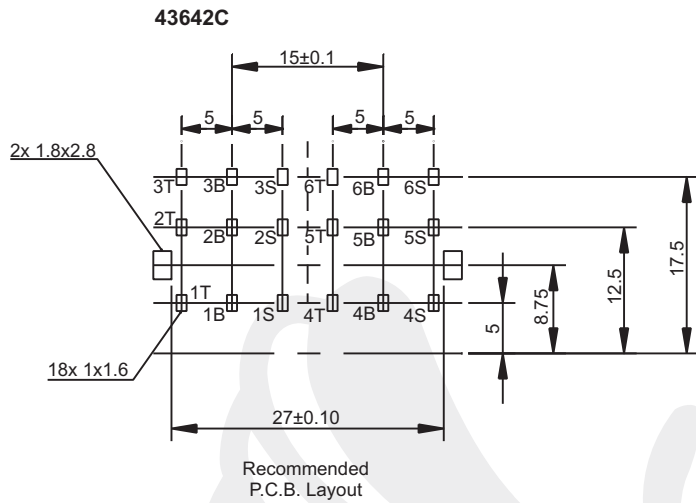



Tolerances	
Linear	<6 ± 0.1
	6-20 ± 0.2
	>20 ± 0.3



All dim. in mm

# Series 43642 6x RCA Jack / Cinch Vertical

43642D

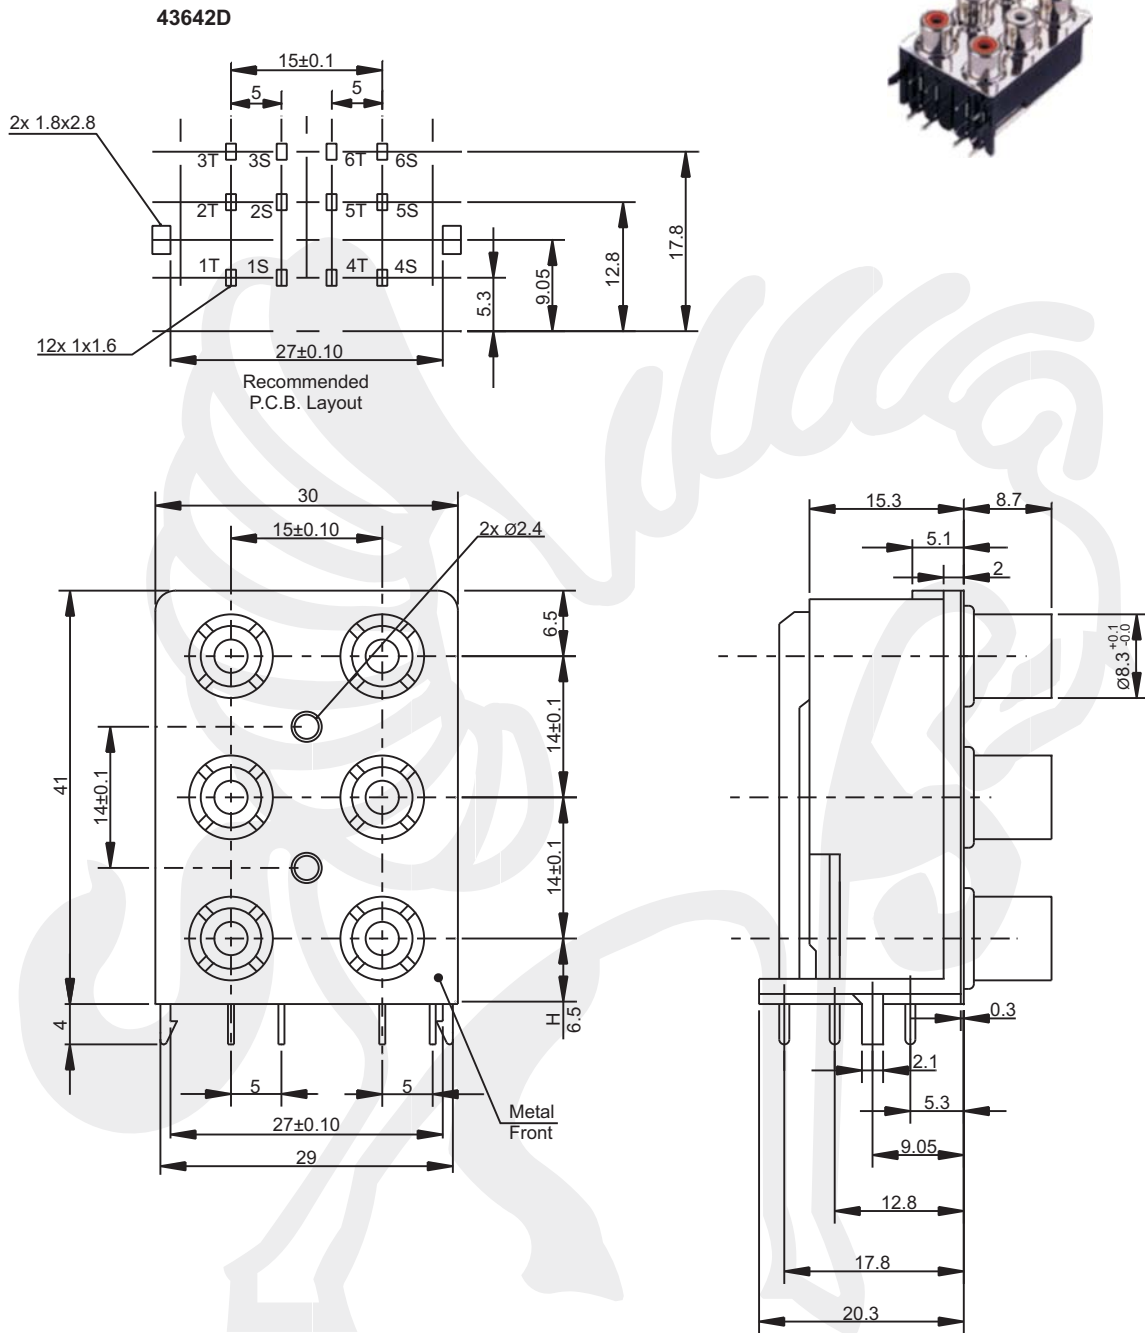

Tolerances	
Linear	<6 ± 0.1
	6-20 ± 0.2
	>20 ± 0.3



This document is protected by copyright law and international treaties. Reproduction except for personal use and distribution of this document will be prosecuted to the maximum extent possible under the law. Subject to changes without prior notice. Errors and omissions excepted. Copyright by NEXUS COMPONENTS GmbH

All dim. in mm