


3892 Series

USB 3.0 Male Plug Type A for Cable

General specifications

Insulator material	PBT w/ 30% glass fiber, UL94V-0
Contact material	Copper alloy
Current rating	1 A
Voltage rating	30 VAC
Contact resistance	30 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	100 VAC for 1 min
Operating temperature	-55 °C to +85 °C
Durability	1500 cycles


Mating parts series

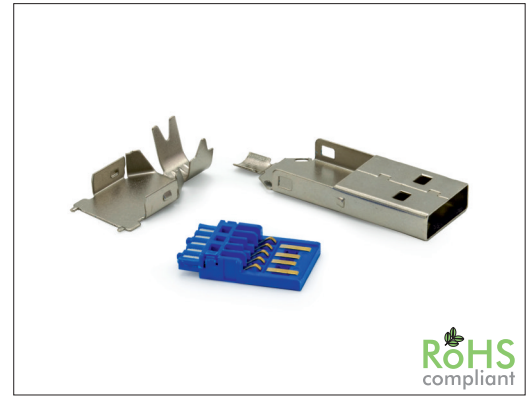

RoHS
compliant

Mechanical dimensions

Unit: mm

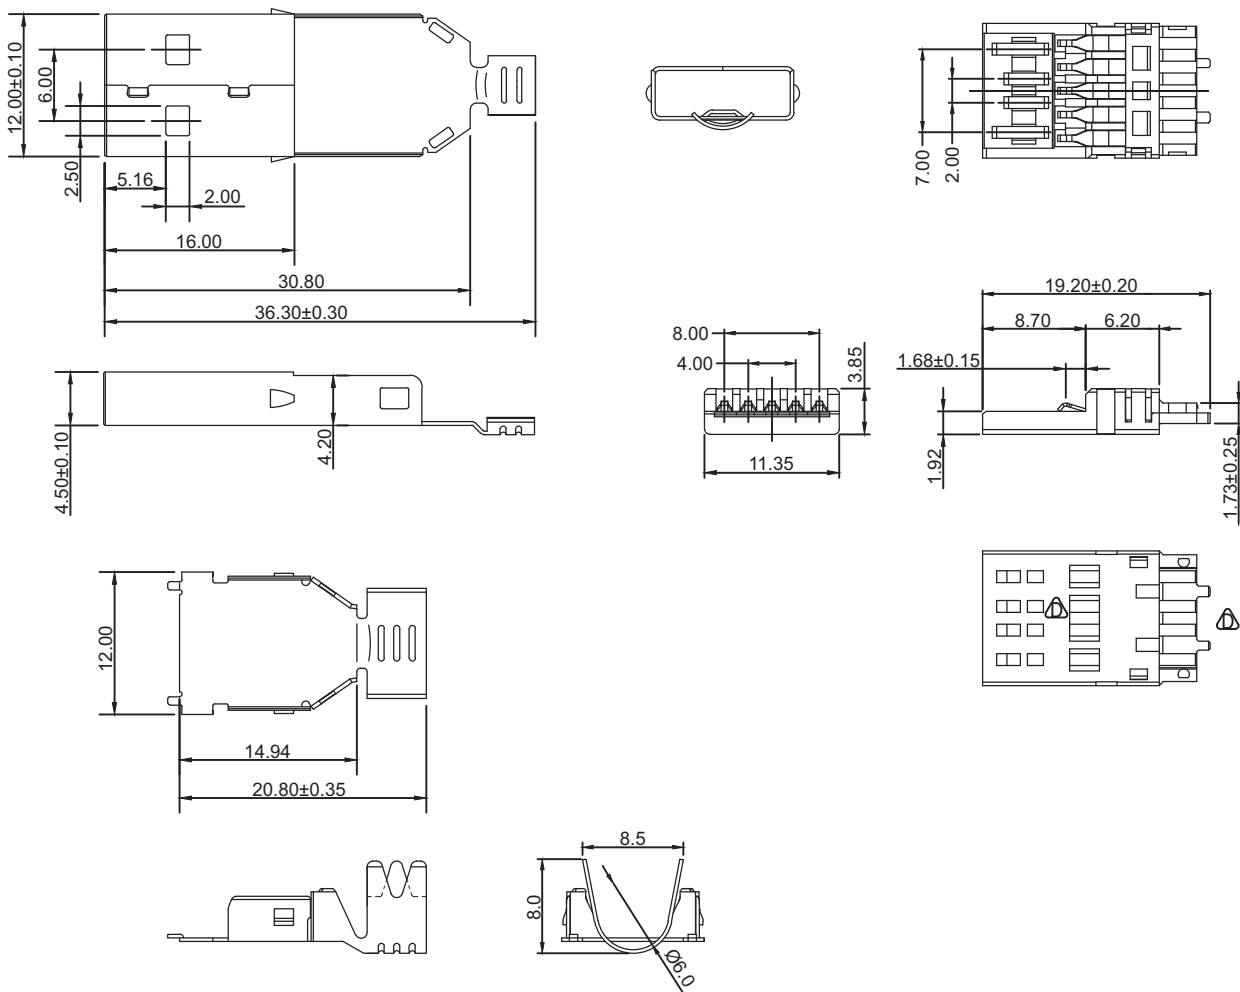

Tolerances

Linear	X	± 0.38
	XX	± 0.25
	XXX	± 0.13

Part numbering guide

3892 M — B — 0

Series

M = Male plug

Contact plating

B = Flashgold

D = 5 μ" gold

F = 15 μ" gold

J = 30 μ" gold

Cover

0 = w/o plastic hood

1 = w/ plastic hood

* standard

