

2280 Series


1.27/2.54 mm Micro-Match Female Header

General specifications

Insulator material	Glass filled polyester, UL94V-0, color: red
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	230 V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ @ 100 VDC
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series


2281-V, 2281-S, 2281-L

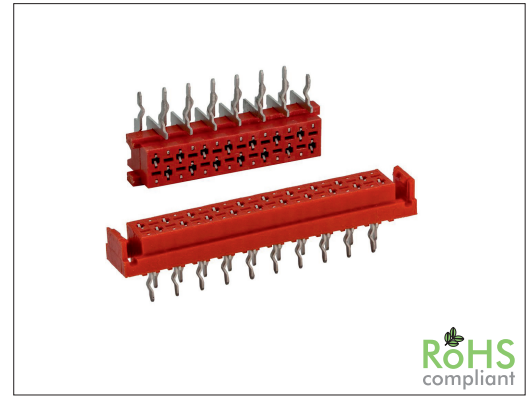

RoHS
compliant

Mechanical dimensions


Unit: mm

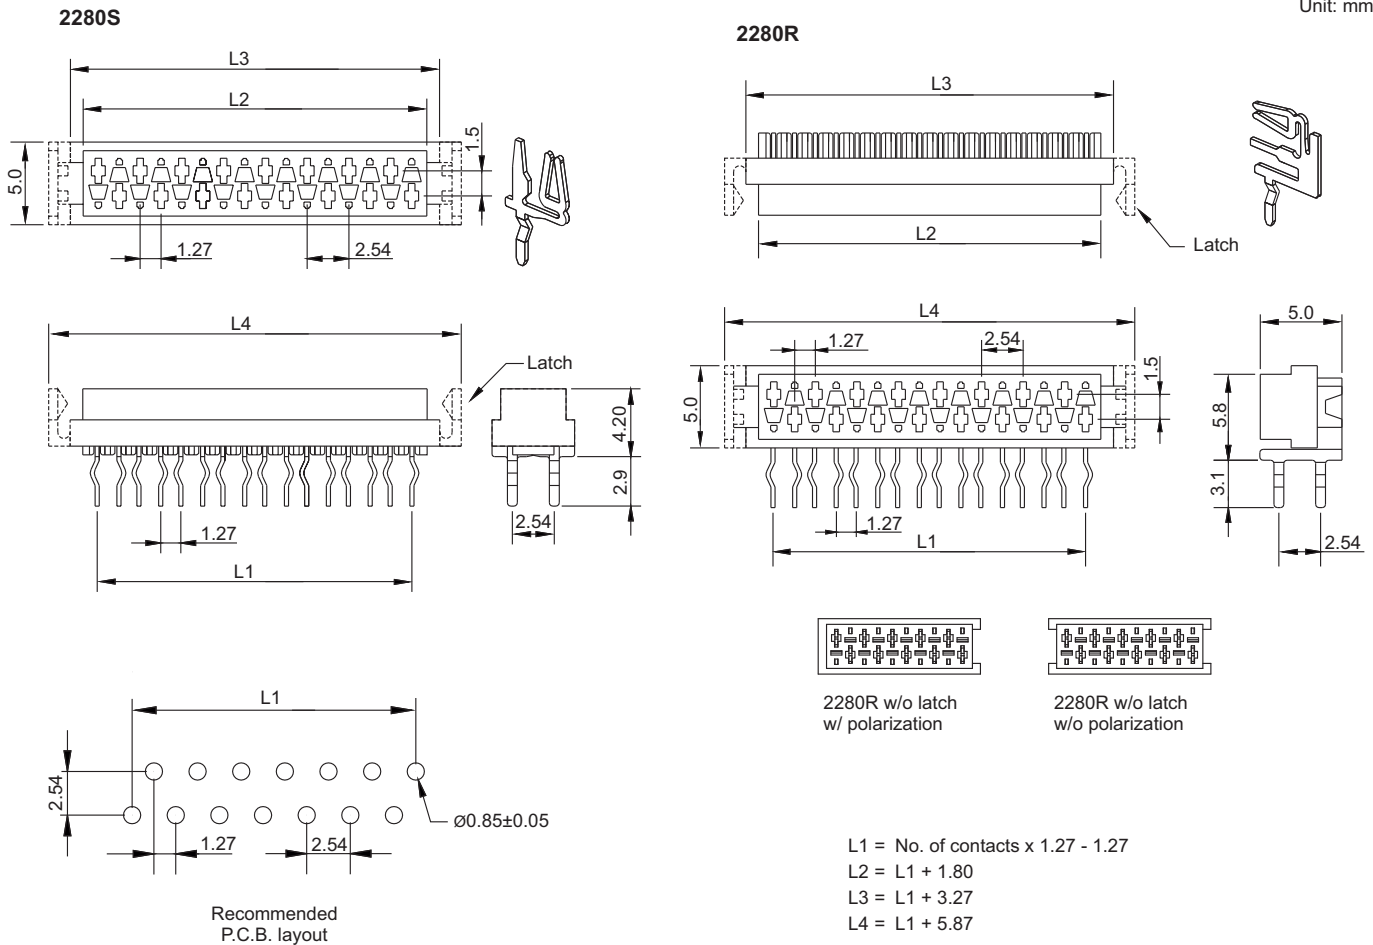

Tolerances

Linear	X	± 0.30
	.XX	± 0.20
	.XXX	± 0.10

Part numbering guide

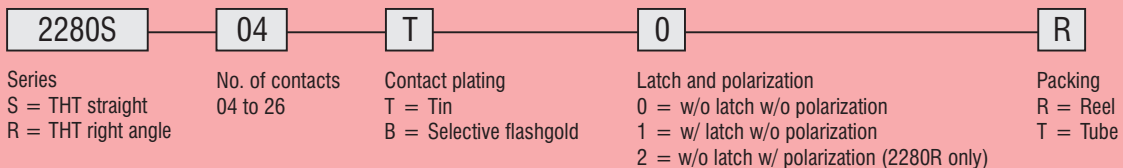

* standard

