

6280X Series

Multiport RJ11 / RJ12 Side Entry Low Profile

General specifications

Insulator material	PBT, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

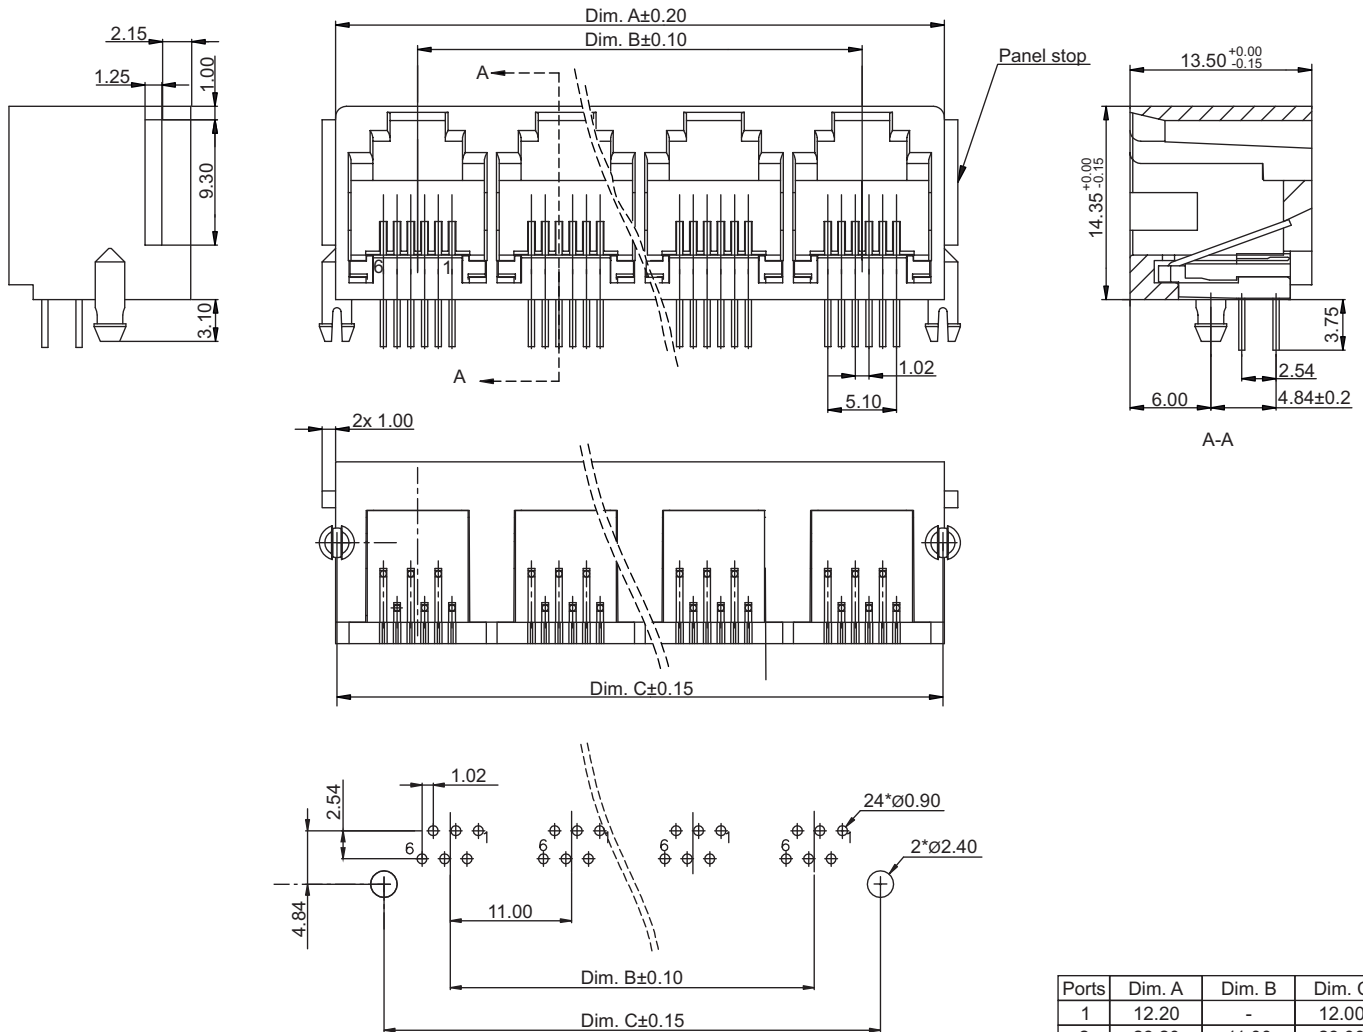

Ports	Dim. A	Dim. B	Dim. C
1	12.20	-	12.00
2	23.20	11.00	23.00
4	45.20	33.00	45.00
6	67.20	55.00	67.00
8	89.20	77.00	89.00

Tolerances		
Linear	X	± 0.20
	.XX	± 0.15
	.XXX	± 0.10

Recommended P.C.B. layout
component side

Part numbering guide

6280	A	C	6	0
Series	No. of ports A = 1 H = 8 B = 2 D = 4 F = 6	Contact plating C = 3 μ" gold K = 50 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold	No. of contacts 4, 6	Panel stop 0 = w/o panel stop 1 = w/ panel stop

* standard

