3927 Series IEEE 1394 6 Pin Socket vertical

General specifications	
Insulator material	PBT, UL94V-0
Contact material	Brass
Current rating	1.5 A
Voltage rating	40 V AC/DC
Contact resistance	30 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-55 °C to +85 °C
Durability	1500 cycles

Mating parts series



RoHS compliant

Mechanical dimensions

Unit: mm

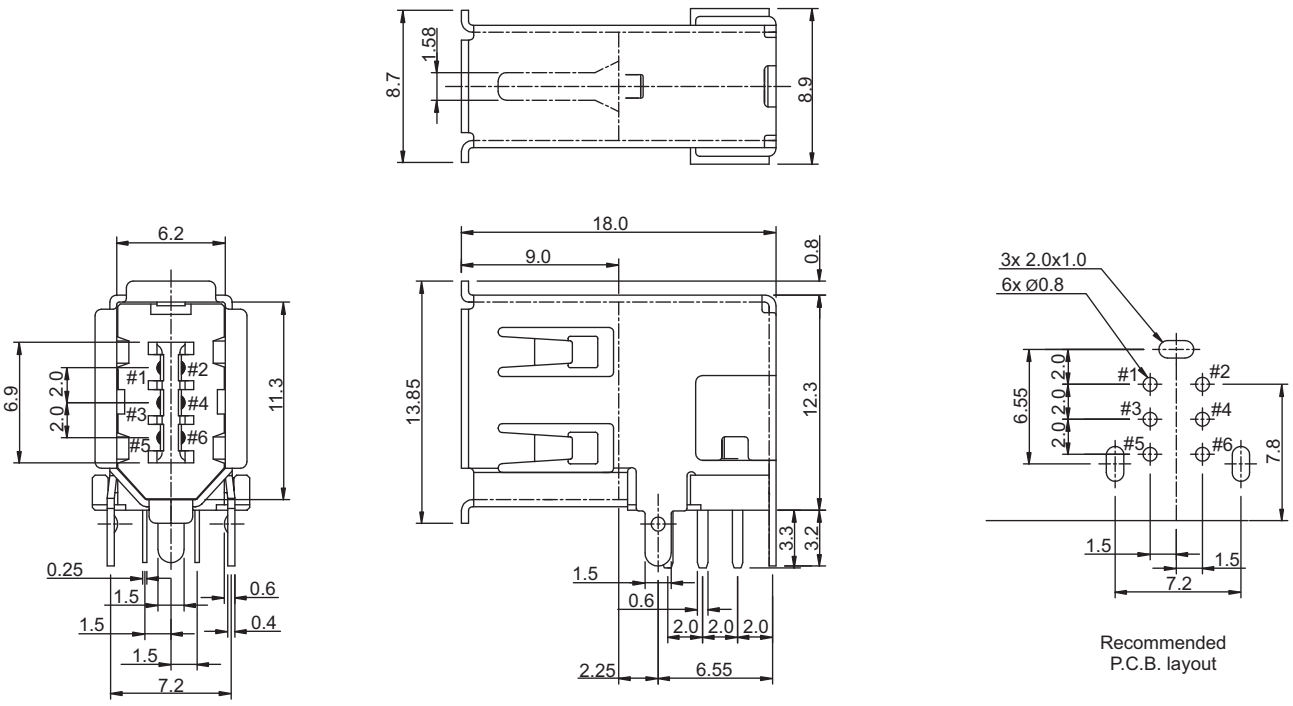

Recommended P.C.B. layout

Tolerances	
Linear	± 0.20

Part numbering guide

3927 R	J	B	Y
Series	Contact plating	Color	Packing
R = THT right angle	J = 30 µ" gold	B = Black	Y = Tray

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics