


43100 Series RCA Jack Full Metal

General specifications

Insulator material	PBT, UL94V-0
Contact material	Brass
Current rating	0.2 A
Voltage rating	50 VDC
Contact resistance	30 mΩ max.
Insulator resistance	100 MΩ min. @ 500 VDC
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +70 °C
Soldering	Lead free wave soldering process
Durability	500 cycles






Mating parts series

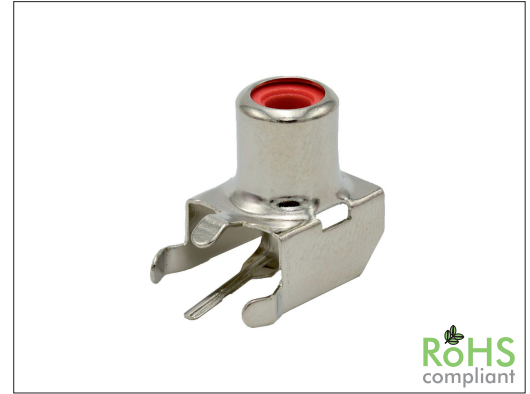

RoHS
compliant

Mechanical dimensions

Unit: mm



Tolerances		
Linear	<6	± 0.20
	6 to 20	± 0.30
	>20	± 0.40

Part numbering guide

43100 Z — 01

Series

Color

01 = Black 05 = Green
02 = Red 06 = Orange
03 = White 07 = Yellow
04 = Blue

* standard

