49581 Series Adapter SMA Jack to BNC Plug

General specifications	
Insulator material	Teflon
Contact material	Beryllium copper, plating: gold
Body material	Brass, plating: nickel
Shell material	Brass, plating: nickel
Impedance	50 Ω
Frequency range	0 to 1 GHz
Contact resistance	Center: 10 mΩ max. / outer: 6 mΩ max.
Insulator resistance	1000 MΩ min.
Operation temperature	-55 C to +105 C
Durability	500 cycles

RoHS compliant

Mechanical dimensions

Unit: mm

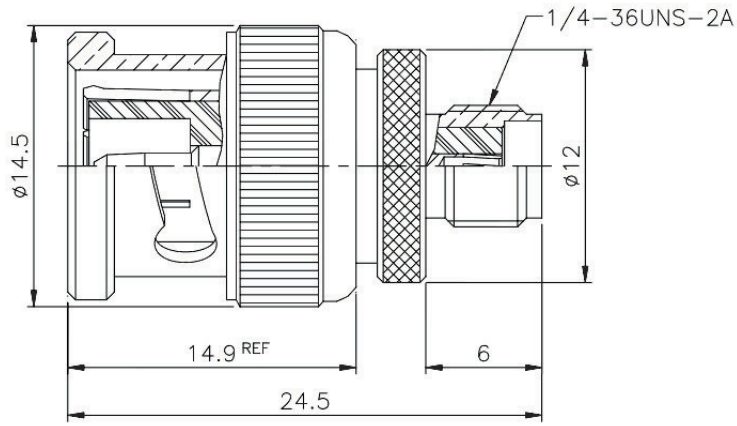

Tolerances		
Linear	<6	± 0.2
	6 to 30	± 0.4
	>30	± 0.6

Part numbering guide

49581

Series

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics