


62380 Series SMT RJ11 / RJ12 Board-In

General specifications

Insulator material	PA9T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process
Durability	750 cycles


Mating parts series

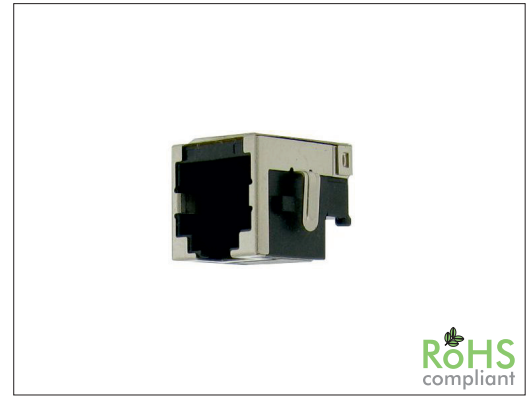

RoHS
compliant

Mechanical dimensions

Unit: mm

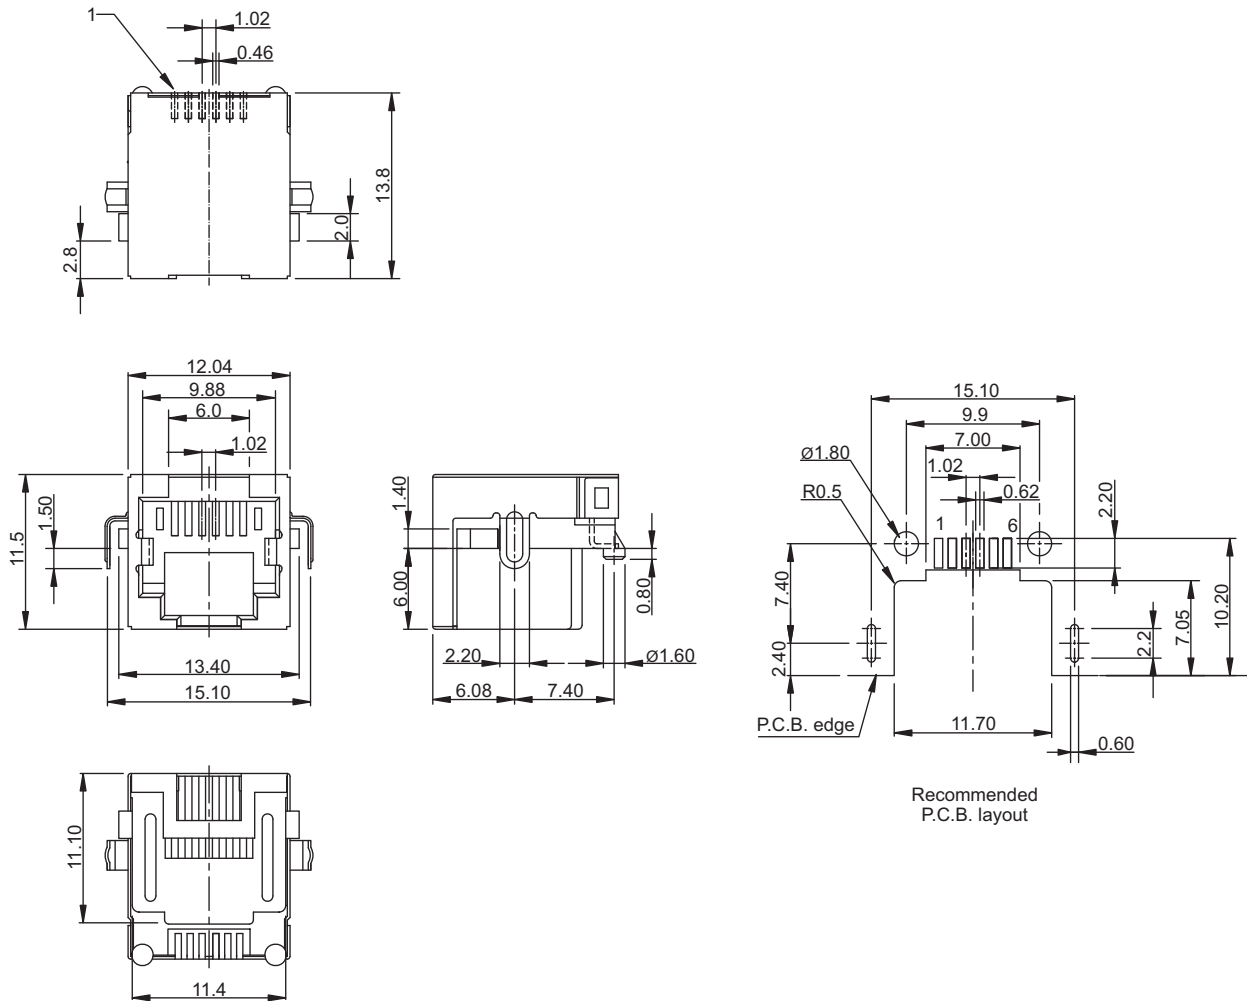

Recommended
P.C.B. layout

Tolerances

Linear	X	± 0.25
	.XX	± 0.13
	.XXX	± 0.05

Part numbering guide

62380

C

6

Series

Contact plating

No. of contacts

C = 3 μm gold K = 50 μm gold

4, 6

D = 6 μm gold

F = 15 μm gold

J = 30 μm gold

* standard

