


62304 Series RJ11 / RJ12 Side Entry

General specifications


Insulator material	PBT w/ glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating	1 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles
Mating parts series	

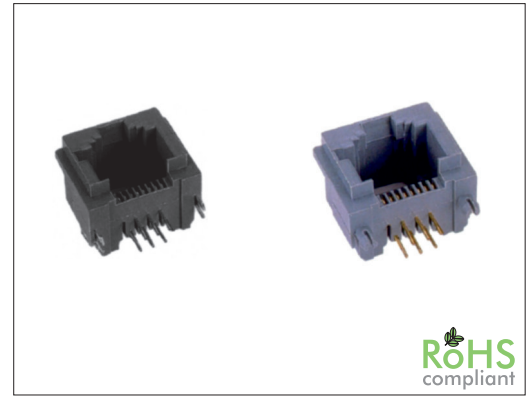


Mechanical dimensions

Unit: mm

Metal board locks

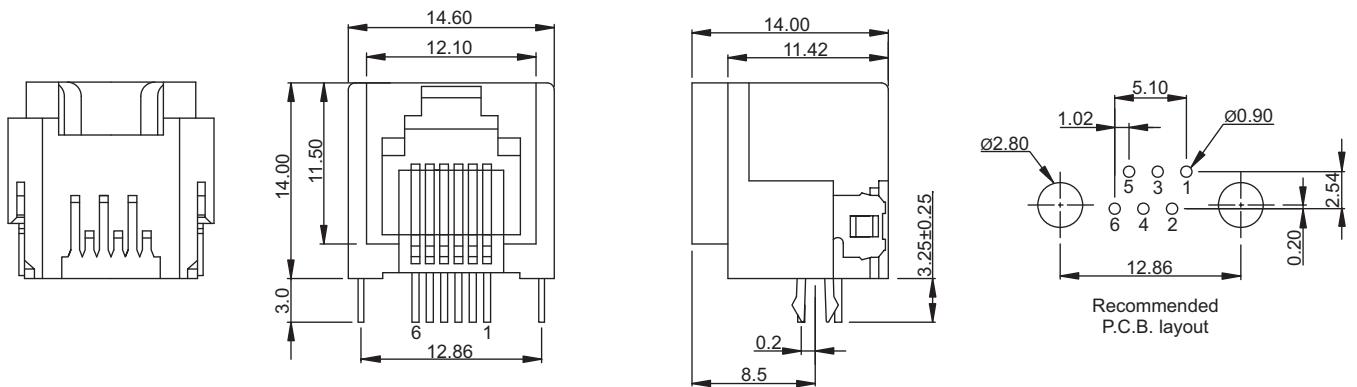

Plastic board locks

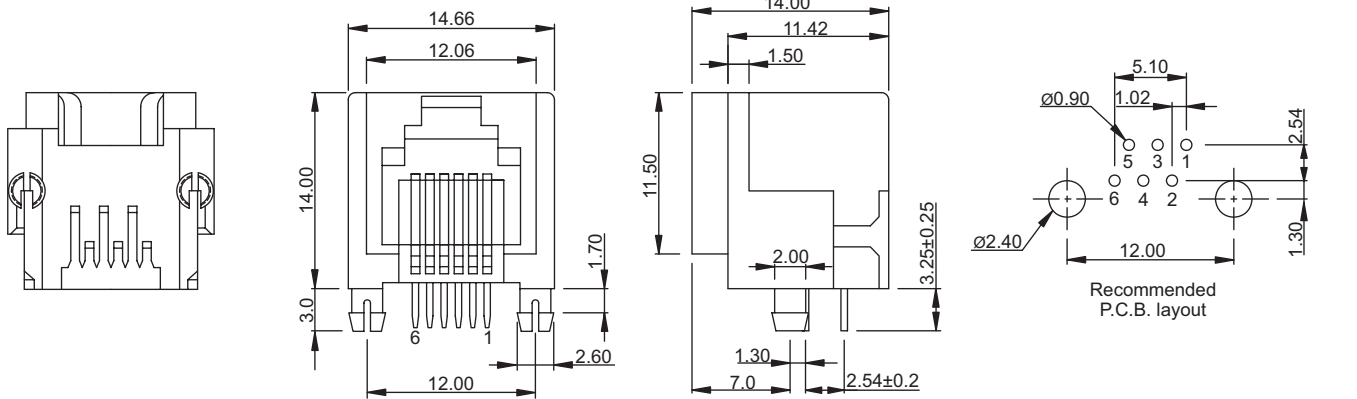

Tolerances

Linear	X	± 0.25
	.XX	± 0.13
	.XXX	± 0.05

Part numbering guide

62304	C	6	M
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold K = 50 μ" gold	No. of contacts 4, 6	Board locks, insulator color M = Metal, black P = Plastic, grey

* standard

