


ESDM Series ESD Metallized Static Shielding Bag

General specifications

Material	PP/PE coated w/ vaporized metal
Outer surface resistance	$4 \times 10^8 \Omega$
Aluminium surface resistance	$1 \times 10^2 \Omega$
Inner surface resistance	$5 \times 10^{10} \Omega$
Decay time	< 0.02 sec
Temperature limits	-35 °C to +55 °C
Thickness	0.08 mm


Mating parts series

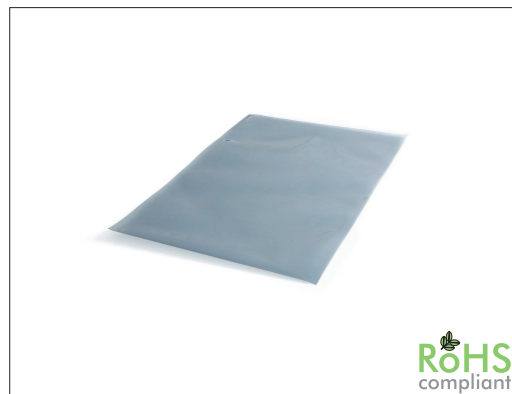

RoHS
compliant

Mechanical dimensions

Unit: mm

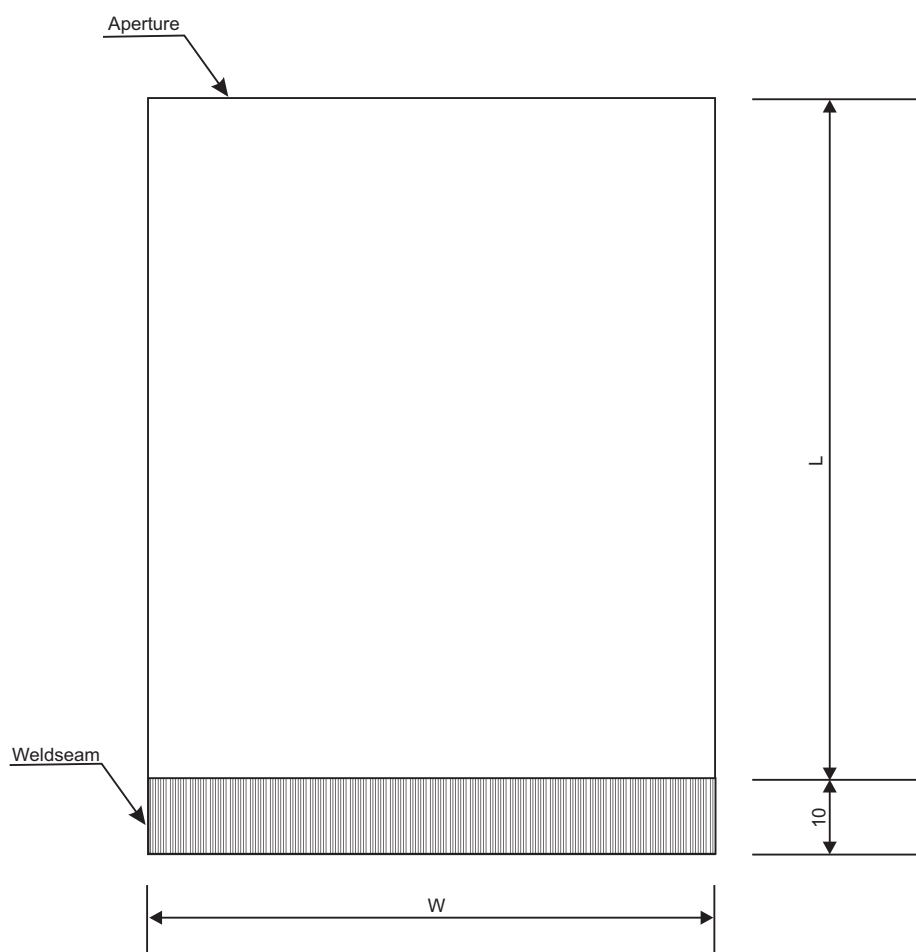

Tolerances	
Linear	± 5.00

Ordercode dimensions		
Ordercode	Width W	Length L
89100100R	100	150
89100200R	150	250
89100300R	200	250
89100350R	200	300
89100500R	150	400
89100800R	250	300
89101000R	300	400
other dimensions on customer request		

Part numbering guide

ESDM

Series
For ordercode see table

* standard

