

# 2390 Series

# 3.96 mm VH Housing w/ Lock and Terminal


### General specifications

Insulator material	Nylon 66, UL94V-0, color: nature
Contact material	Brass, plating: tin
Current rating	7 A
Voltage rating	250 V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1500 VAC for 1 min
Operating temperature	-25 °C to +85 °C
<b>Mating parts series</b>	
2390-SR, 2390-SL-RL	



### Mechanical dimensions

Unit: mm

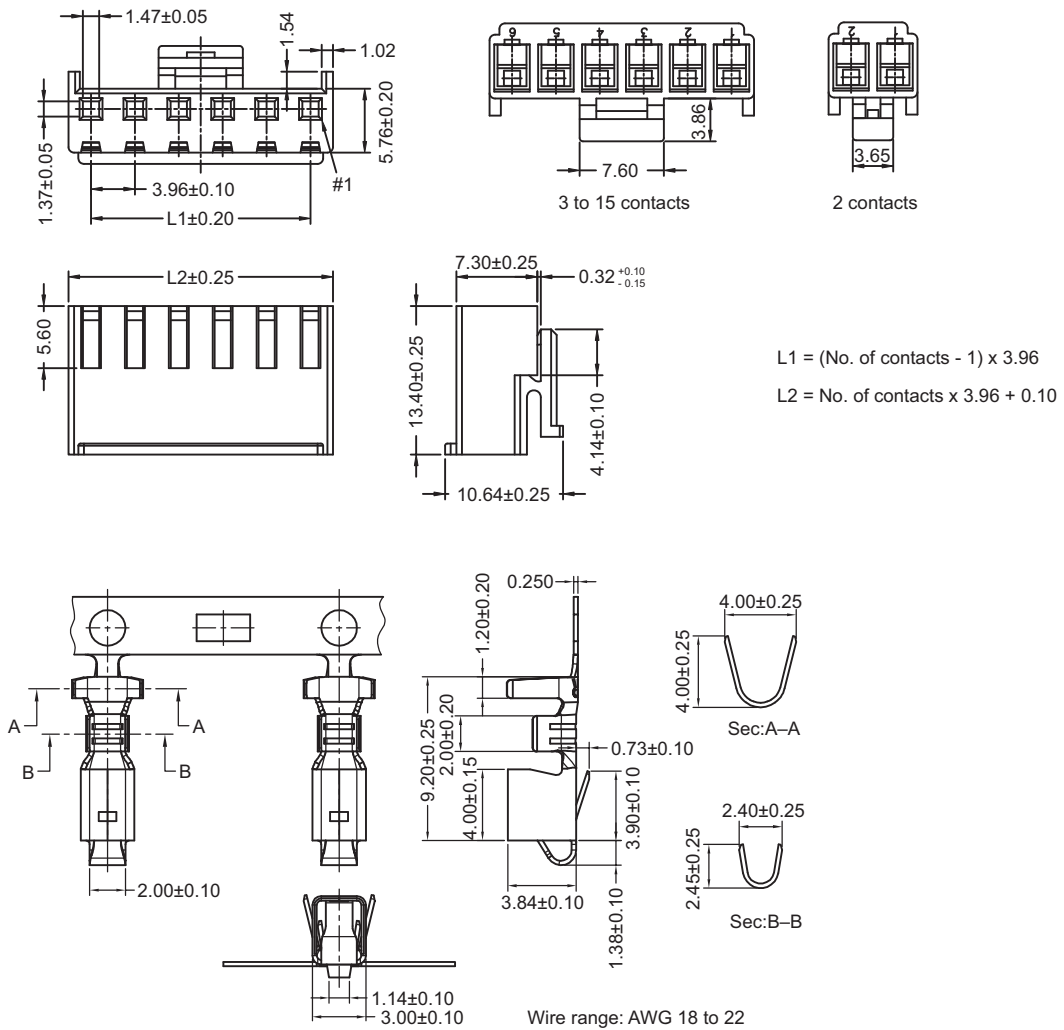

Tolerances		
Linear	X	± 0.25
	.XX	± 0.15
	.XXX	± 0.05

### Part numbering guide

2390 P — 02

Series                      No. of contacts  
 P = Housing                02 to 15  
 T = Terminal                (leave blank for terminal)

\* standard

