


### General specifications

Insulator material	PC, UL94V-0
Contact material	Phosphor bronze, plating: gold
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	20 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +70 °C
Durability	750 cycles


### Mating parts series

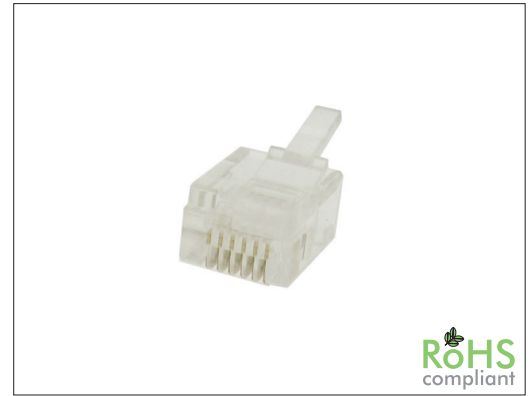

### Mechanical dimensions


Unit: mm

**Standard for round cable**  
**Stranded wire 26 to 28 AWG, max. insulation diameter 0.89 to 0.99**  
**max. cable jacket diameter 2.2 x 6.7**

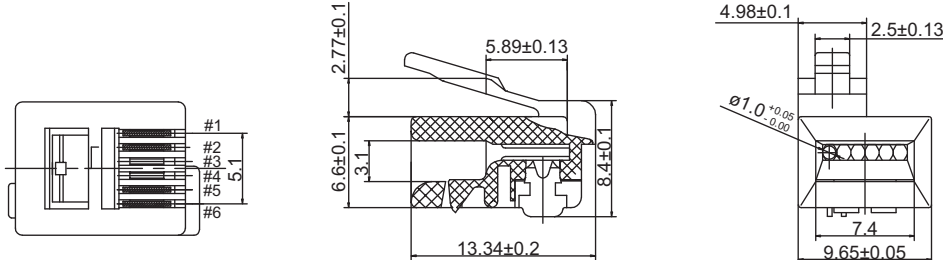

Tolerances		
Linear	<15	± 0.15
	15 to 30	± 0.20
	>30	± 0.25

### Part numbering guide

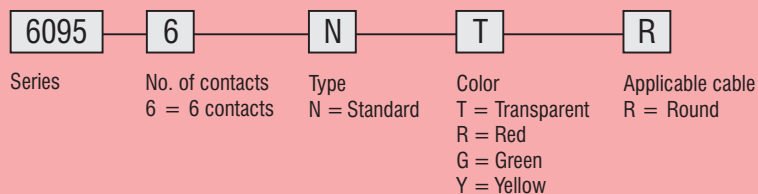

\* standard

