

49379 Series Adapter F Plug to Pal Plug

General specifications


Insulator material	Teflon, Delrin
Body material	Brass, plating: nickel
Center contact material	Phosphor bronze or brass, plating: nickel
Contact resistance	center: 10 mΩ max. / outer: 6 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Frequency range	0 to 1 GHz
Impedance	75 Ω
Operating temperature	-65 °C to +125 °C
Durability	500 cycles



RoHS
compliant

Mechanical dimensions

Unit: mm

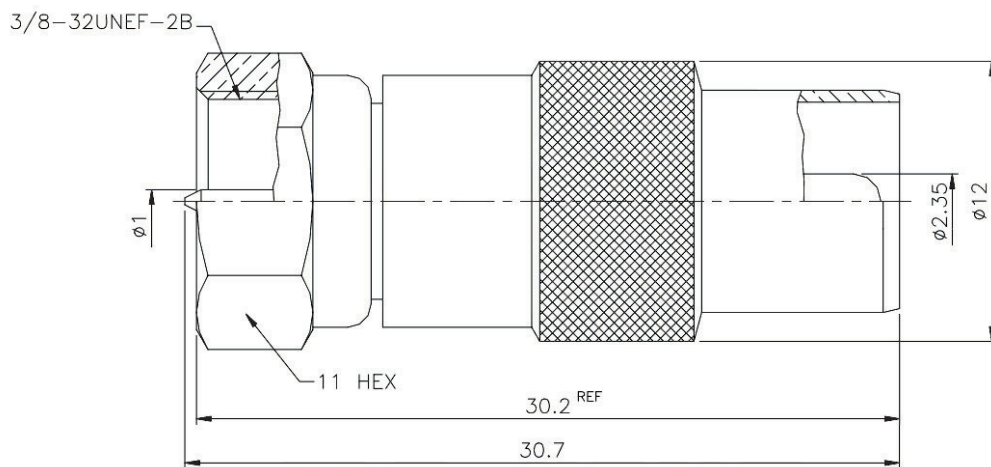

Tolerances		
Linear	.X	± 0.30
	.XX	± 0.10

Part numbering guide

49379

Series

* standard

