

# 1348 Series

# 2.00 mm Box Header w/ Spacer

### General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	2 A
Contact resistance	25 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to 105 °C
Soldering	Lead free wave soldering process


### Mating parts series

1489, 1490, CA0001 or cable assembly



### Mechanical dimensions

Unit: mm

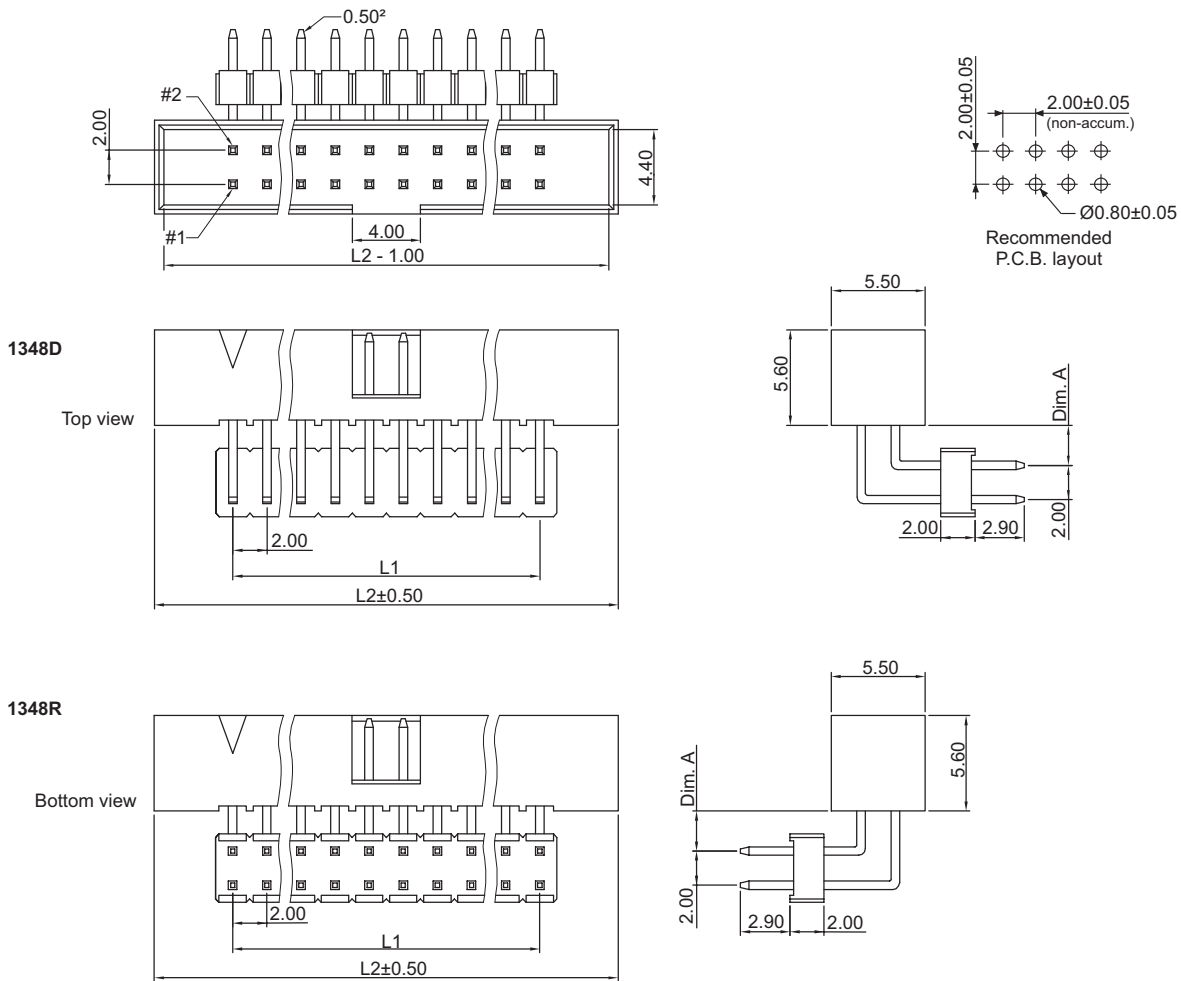

$$L1 = \left( \frac{\text{No. of contacts}}{2} - 1 \right) \times 2.00$$

$$L2 = \left( \frac{\text{No. of contacts}}{2} \right) \times 2.00 + 7.20$$

Ordercode	
Index	Dim. A
00	1.00
01	1.50
other pin length on customer request	

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

### Part numbering guide

1348 R	06	B	00
Series R = THT right angle D = THT left angle	No. of contacts 06 to 16, 20, 24, 26, 30, 34, 40, 44, 50, 68	Contact plating B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	Dimensions index See table

\* standard

