49311 Series F Female Straight

General specifications	
Insulator material	Polypropylene
Body material	Brass, plating: nickel
Contact material	Phosphor bronze, plating: tin
Bracket material	Cold rolled steel, plating: tin
Dielectrical withstanding	1000 VAC
Insulator resistance	500 MΩ min.
Contact resistance	20 mΩ max.
Impedance	75 Ω

Mating parts series

RoHS compliant

Mechanical dimensions

Unit: mm

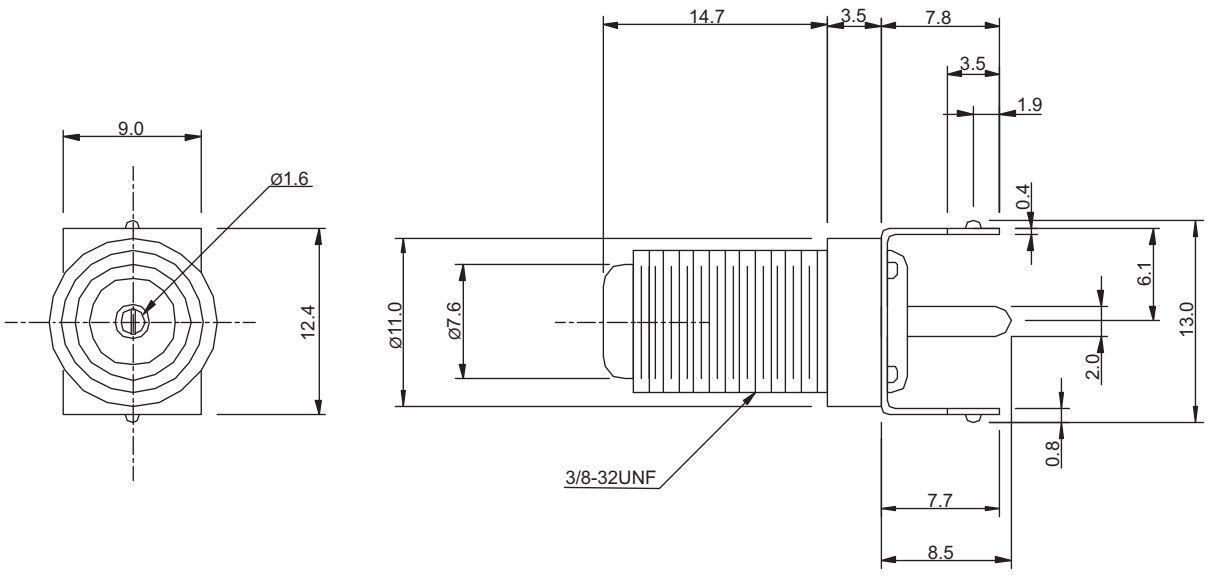



Recommended P.C.B. layout

Tolerances		
Linear	< 6	± 0.20
	6 to 30	± 0.40
	> 30	± 0.60

Part numbering guide

49311

Series

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics