


1984 Series

1.50 mm SMT Board to Board (LED Stripe)

General specifications

Insulator material	High temperature plastic, UL94V-0
Contact material	Copper alloy
Current rating	1 A
Voltage rating	150 VAC
Contact resistance	20 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process



Mating parts series





Mechanical dimensions

Unit: mm

1984P

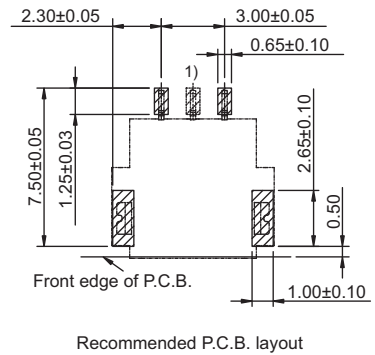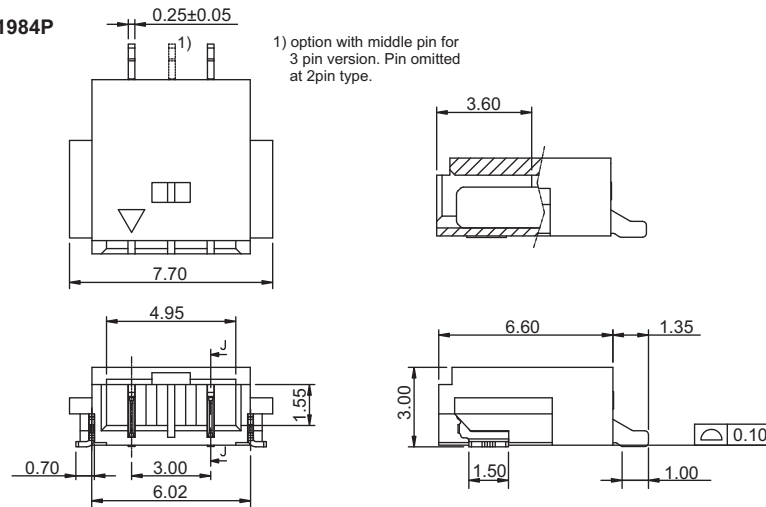

1984S

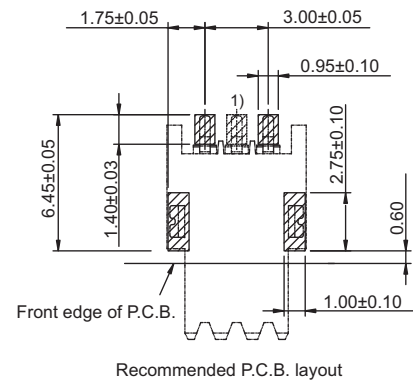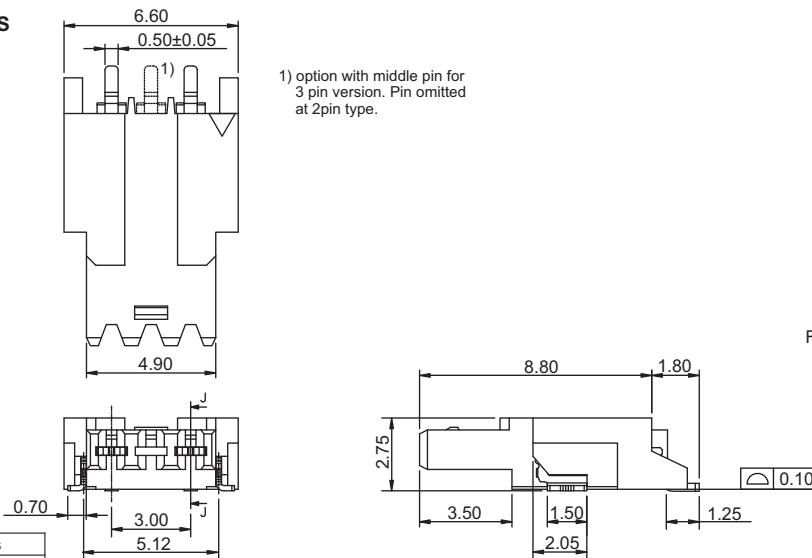

Tolerances		
Linear	X	± 0.30
	.XX	± 0.20

Part numbering guide

1984 P	02	T	R
Series P = Plug S = Socket	No. of contacts 02, 03	Contact plating T = Tin	Packing R = Reel

* standard

