

2259 Series


2.50 mm Pin Header w/ Lock

General specifications

Insulator material	Nylon 66, UL94V-0, color: natural
Contact material	Brass
Current rating	2 A
Voltage rating	250 V AC/DC
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process


Mating parts series

2259-PT or cable assembly

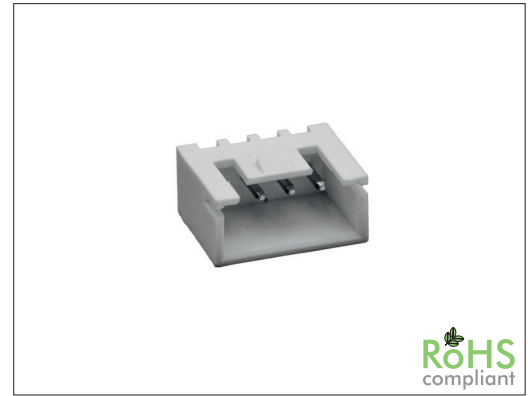

Mechanical dimensions

Unit: mm

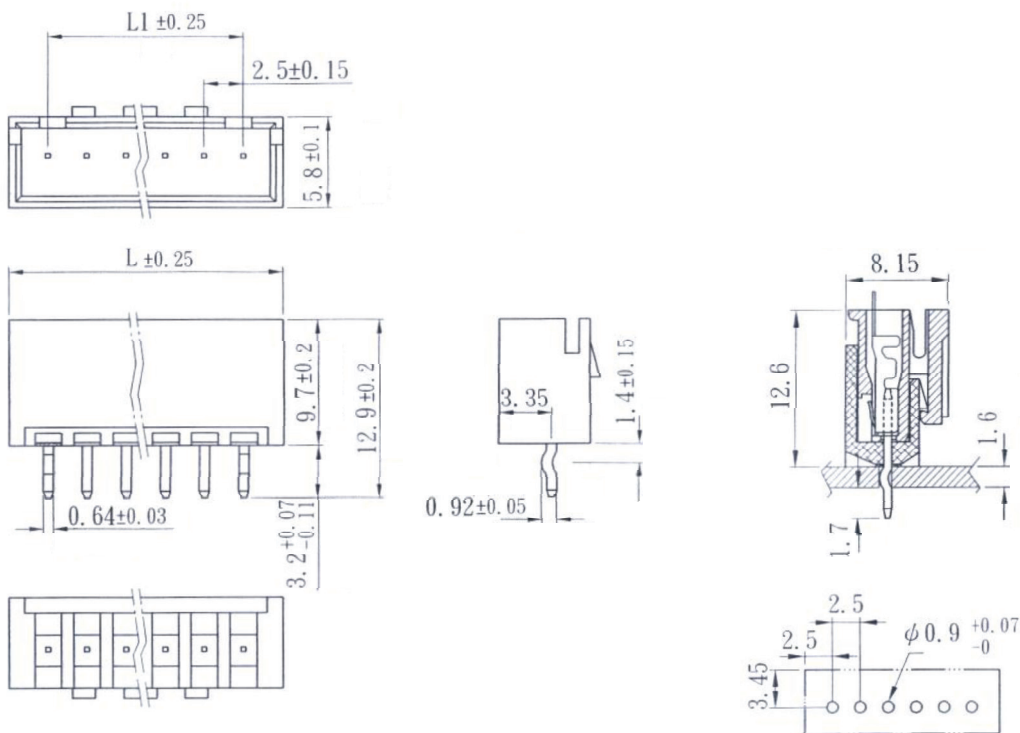

Applicable P.C.B Thickness: 1.6mm

L1 = No. of contacts x 2.50 - 2.50
 L = No. of contacts x 2.50 + 2.50

Tolerances	
Linear	± 0.3

Part numbering guide

2259S	02	T	1
Series S = THT straight	No. of contacts 02 to 15	Contact plating T = Tin	Kink 1 = w/ kink

* standard

