

5924 Series

AC Inlet Socket Solder Type Snap-In


General specifications

Insulator material	Thermoplastic w/ glass fiber, UL94V-2 to UL94V-0
Current rating	2.5 A
Voltage rating	250 VAC
Insulator resistance	100 MΩ min.
Dielectrical withstanding	2000 VAC for 1 min
Operation temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process
Safety approvals available, certificates on request	
Mating parts series	



Mechanical dimensions

Unit: mm

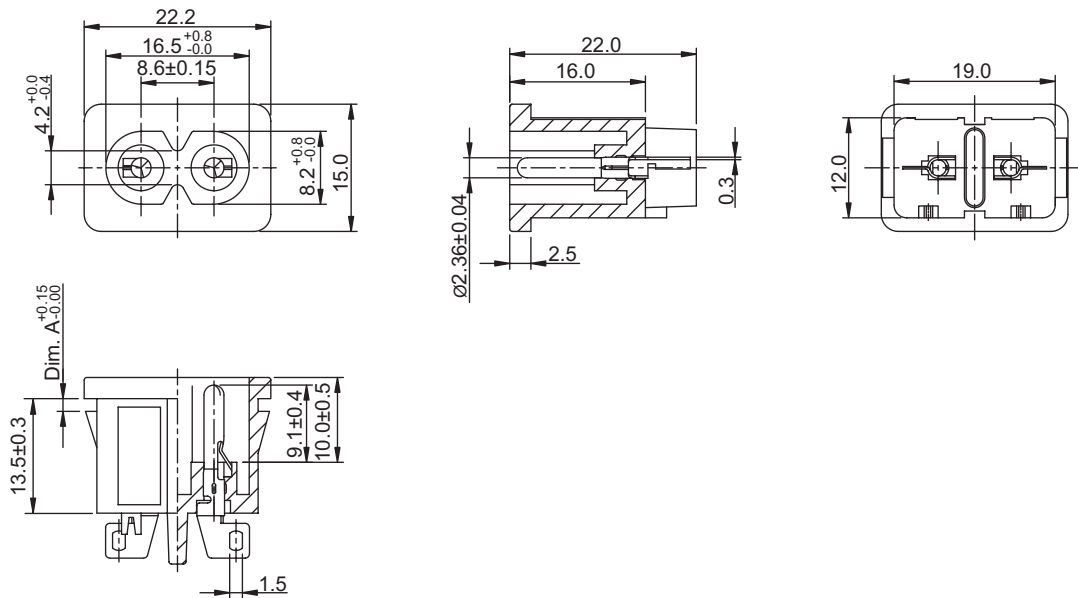

Tolerances	
Linear	XX.XX ± 0.20
	X.XX ± 0.10

Part numbering guide

5924 A

Series

12

Panel thickness Dim. A

12 = 1.20 mm
15 = 1.50 mm

V0

Material

V0 = UL94V-0
V1 = UL94V-1
V2 = UL94V-2

* standard

