




# Series 43084 Dual Mini DIN - 6x RCA Jack Combination Top Entry

## Material

Housing: PBT + Glass fiber  
 Mini DIN Term.: Phosphor bronze, tin plated  
 RCA Term.: Brass, tin plated  
 Shield: Brass, nickel plated

## Electrical

Rating: 0.2 Amp @ 50 VDC  
 Contact resistance: 30 mΩ max.  
 Insulator resistance: 100 MΩ min.  
 Dielectrical withstanding: 250 VAC/minute  
 Operating temperature: -25°C ~ +70°C  
 Durability: 100 cycles

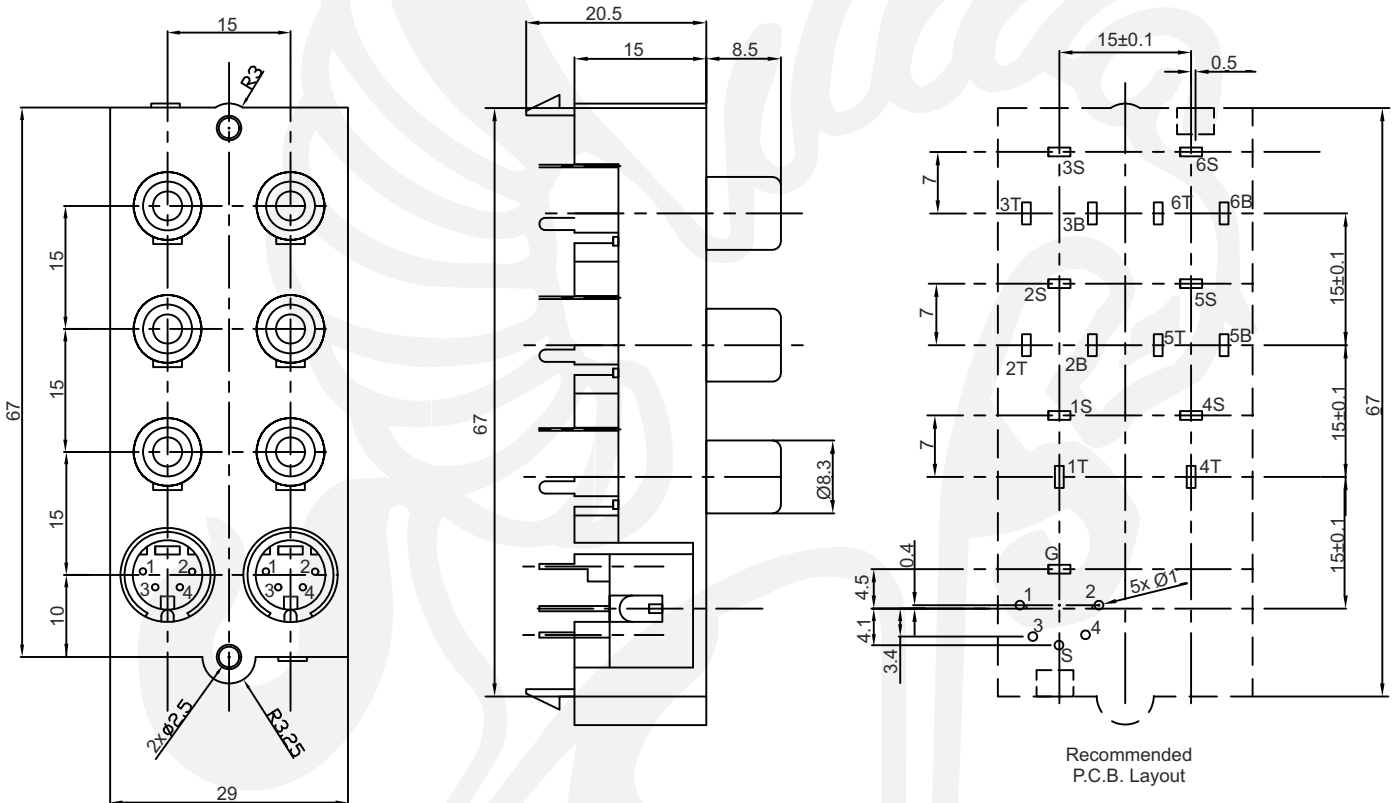

Tolerances	
Linear	<6 ±0.1
	6-20 ±0.2
	>20 ±0.3



All dim. in mm

**43084 Z** — **01**

Series  
43084Z

Color code  
 01 = black    05 = green  
 02 = red      06 = orange  
 03 = white    07 = yellow  
 04 = blue

Packing  
Tray