

3104 Series

D-Sub C5W5 Housing

General specifications

Insulator material	Glass filled polyester, UL94V-0
Contact material	Brass
Shell material	Steel, plating: tin
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-55 °C to +125 °C
Durability	100 cycles
Mating parts series	






RoHS compliant




Mechanical dimensions

Unit: mm

3104M

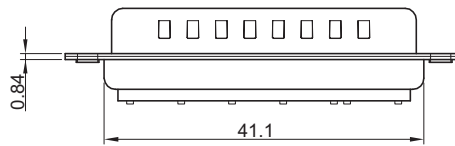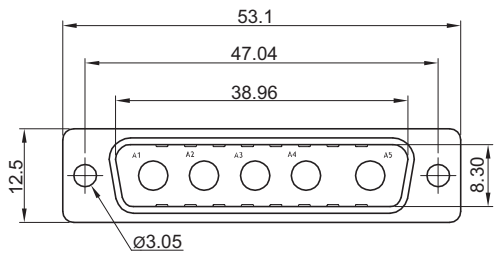

3104F

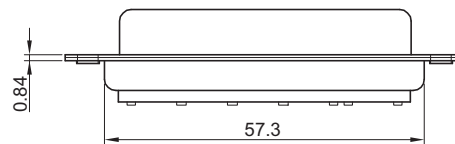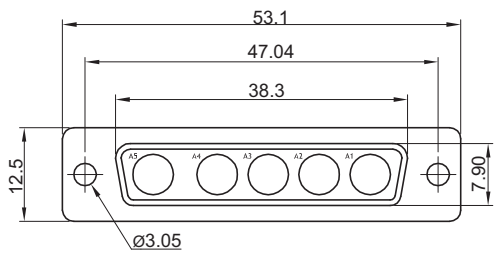

Applicable contact series	
High power	3117, 3118
Coaxial	3119

Type 0 (w/ Ø3.05 holes)	Type A (w/ rivited front bolts)	Type B (w/ rivited front bolts)	Type C (w/ rivited rear bolts)

Tolerances		
Linear	X	± 0.30
	XX	± 0.20
	XXX	± 0.10

Part numbering guide

3104 F	0	0
Series F = Female M = Male	Signal contact plating 0 = w/o signal contact	Mounting type 0 = w/o screws A = w/ rivited front bolts 5.8 mm B = w/ rivited front bolts 4.0 mm C = w/ rivited rear bolts 4.0 mm

* standard

