


49121 Series Dual BNC Female Right Angle

General specifications


Insulator material	Polypropylene, UL94-HB
Housing material	PBT w/ 30% glass fiber, UL94V-0
Contact material	Phosphor bronze, plating: gold
Body material	Zinc alloy, plating: nickel
Frequency range	0 to 1 GHz
Contact resistance	3 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	1500 VAC for 1 min
Operating temperature	-65 °C to +165 °C
Soldering	Lead free wave soldering process
Durability	500 cycles

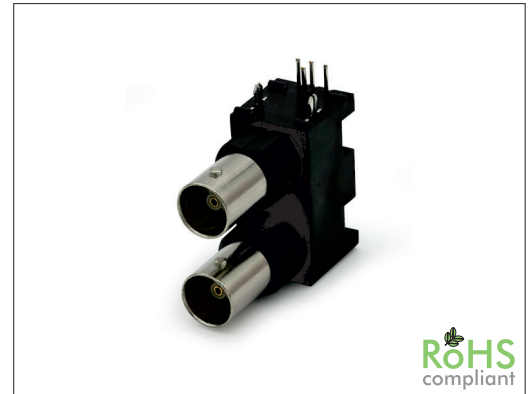

RoHS
compliant

Mechanical dimensions

Unit: mm

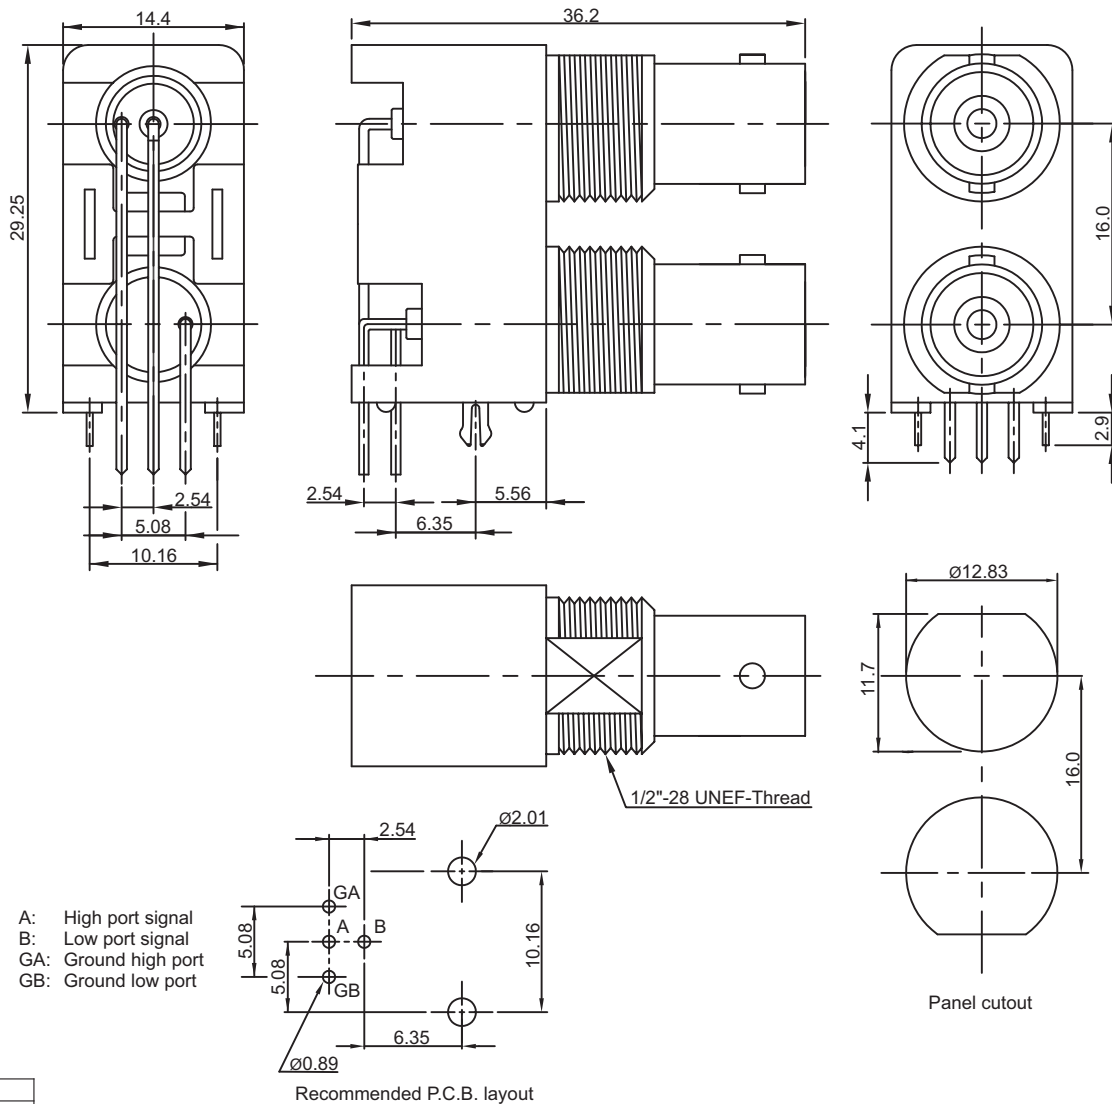

Tolerances

Linear	X	± 0.30
	.XX	± 0.10

Part numbering guide

49121	K	50	B
Series	Mounting K = Hook	Impedance 50 = 50 Ω 75 = 75 Ω	Color B = Black W = White

* standard

