

1152 Series


1.27 x 1.27 mm SMT Pin Header Dual Row

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process


Mating parts series

1134, 1135, 1136, 1182, 1184, 1188

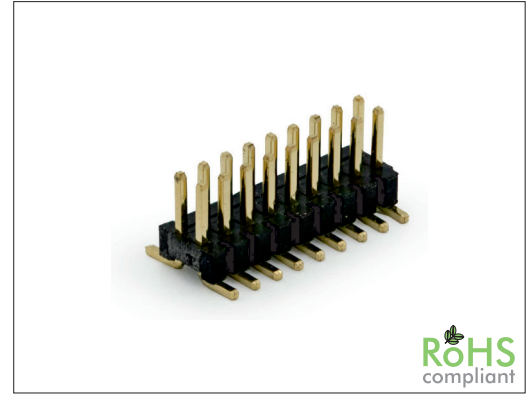

Mechanical dimensions

Unit: mm

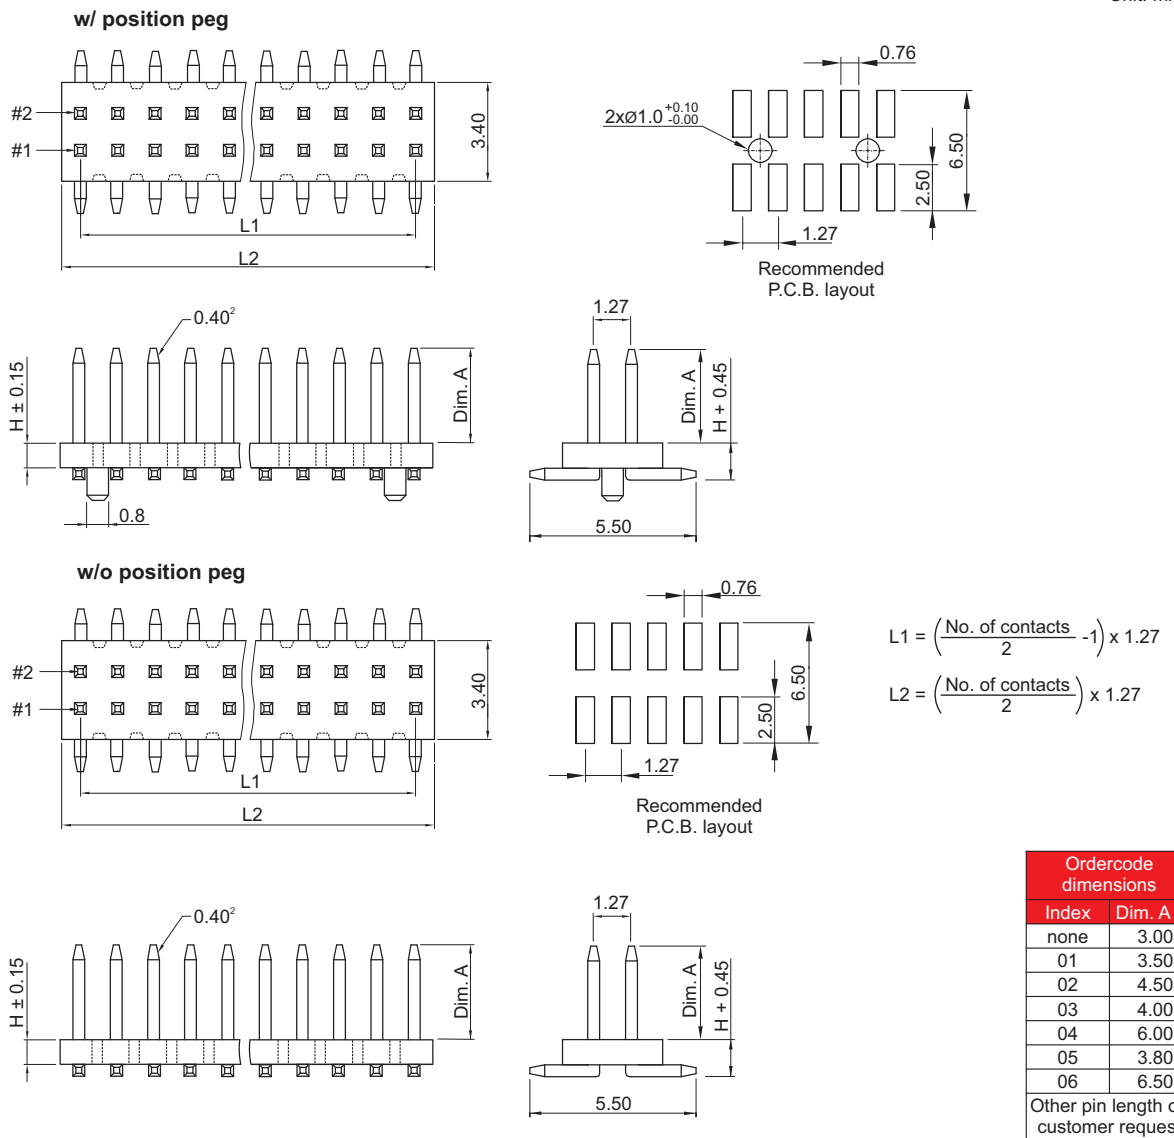

Part numbering guide

1152 V — 04 — B — 1 — 0 — R —

Series V = SMT vertical	No. of contacts 04 to 100 w/o pos. peg 08 to 100 w/ pos. peg	Contact plating B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	Body height H 1 = 1.00 mm 2 = 1.50 mm 3 = 2.00 mm 4 = 2.50 mm	Position peg 0 = w/o pos. peg 1 = w/ pos. peg	Packing with pick & place pad R = Reel (max. total header height 20 mm) T = Tube	Dimensions index See table
----------------------------	--	--	---	---	--	-------------------------------

* standard

