


2884 Series

1.00 mm SMT FPC ZIF Socket Vertical

General specifications


Insulator material	LCP, UL94V-0, color: natural
Contact material	Phosphor bronze, plating: tin or flashgold over nickel
Current rating	0.5 A
Voltage rating	50 V AC/DC
Contact resistance	30 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process

Mating parts series

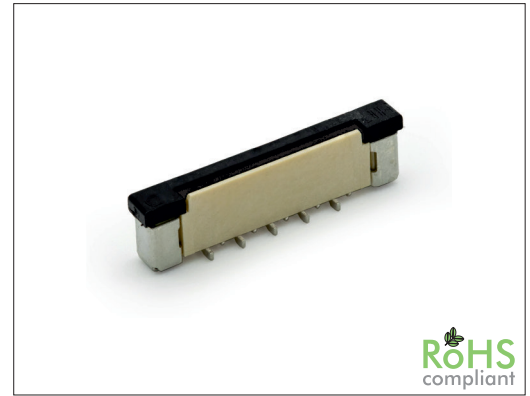

Mechanical dimensions

Unit: mm

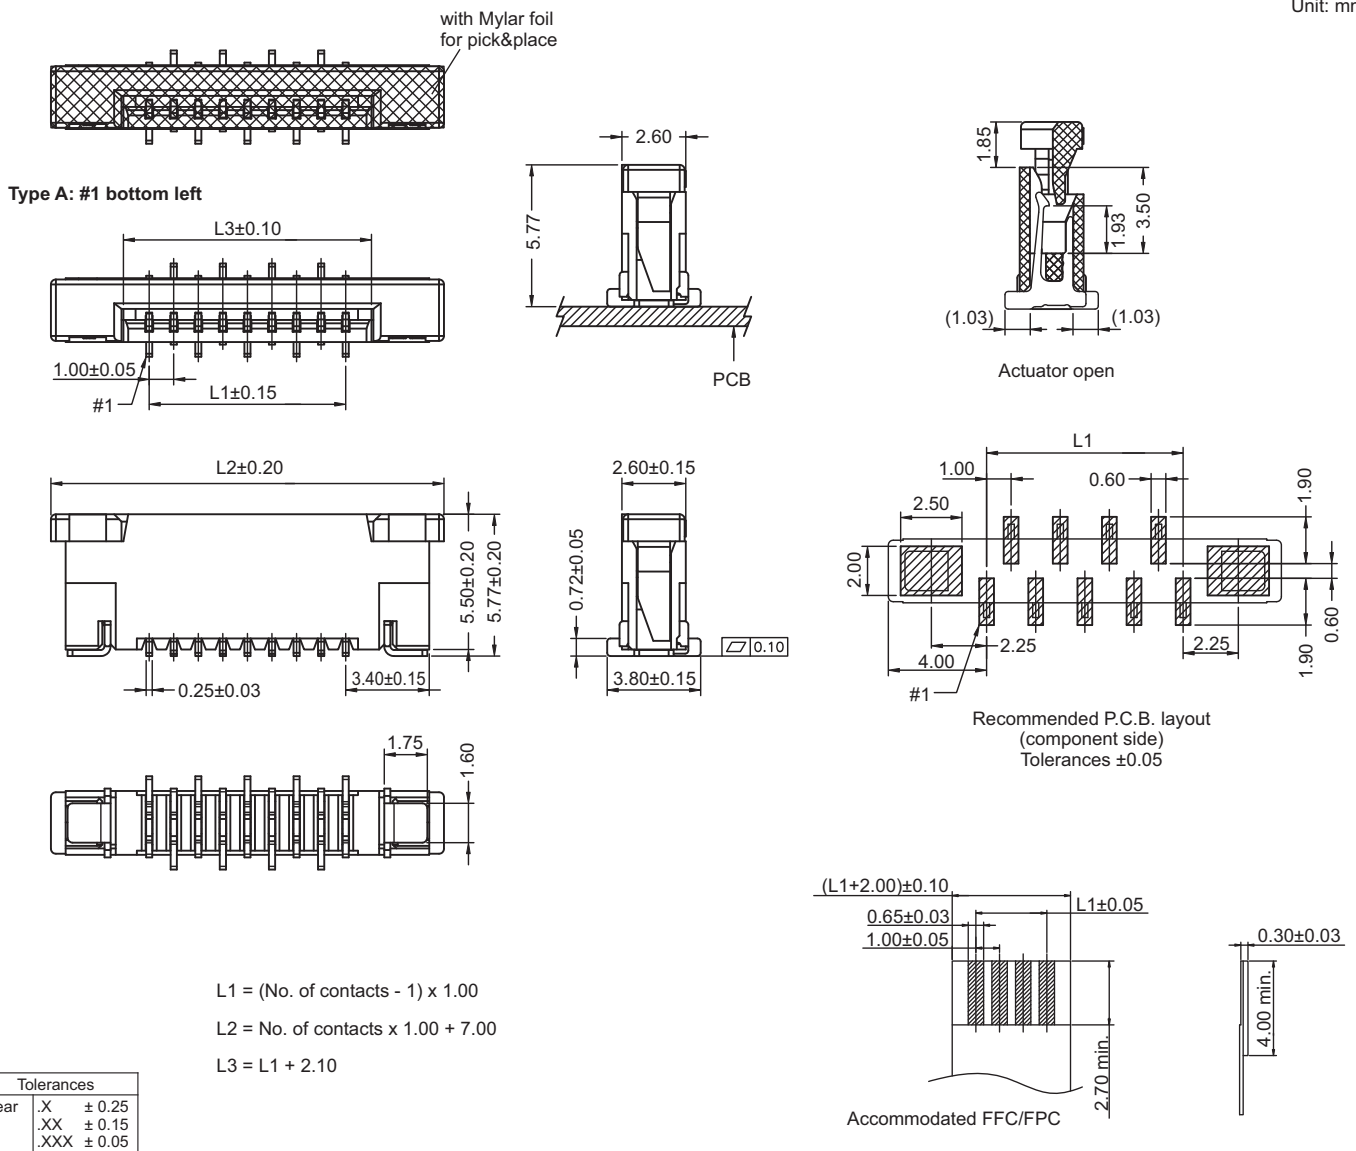

Part numbering guide

2884 VJ	04	T	A	R
Series VJ = SMT vertical	No. of contacts 04 to 34	Contact plating T = Tin* B = Flashgold	Pin 1 position A = Bottom left	Packing R = Reel

* standard

