64322 Series RJ45 8P Side Entry

General specifications	
Insulator material	Polyester w/ glass fiber, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles
Mating parts series	



RoHS compliant

Mechanical dimensions

Unit: mm

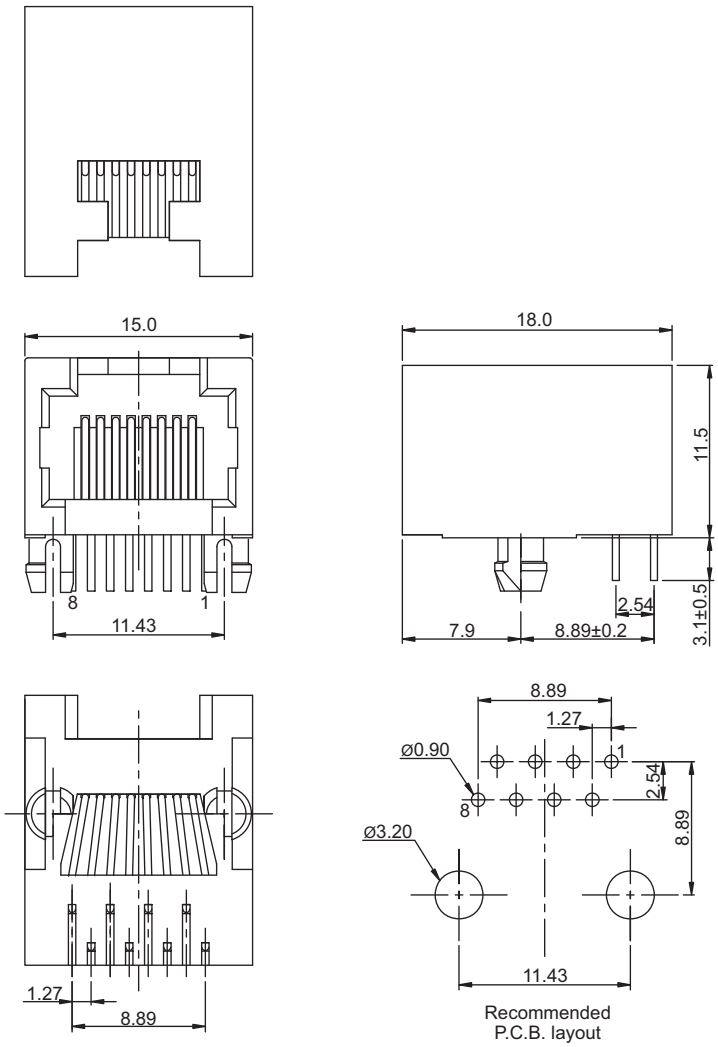

Recommended P.C.B. layout

Tolerances		
Linear	.X	± 0.20
	.XX	± 0.15
	.XXX	± 0.10

Part numbering guide

64322 — C

Series

Contact plating
C = 3 µ" gold
D = 6 µ" gold
F = 15 µ" gold
J = 30 µ" gold
K = 50 µ" gold

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics