

2204 Series


2.00 mm IDC Female Header Dual Row

General specifications

Insulator material	High temperature plastic w/glass fiber, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Contact resistance	30 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C



Mating parts series

2204-R, 2204-S, 2204-V



Mechanical dimensions

Unit: mm

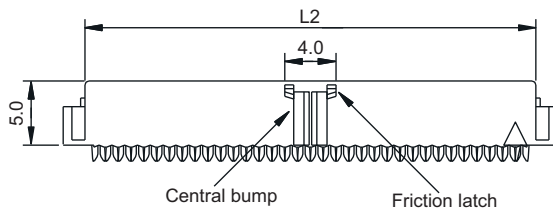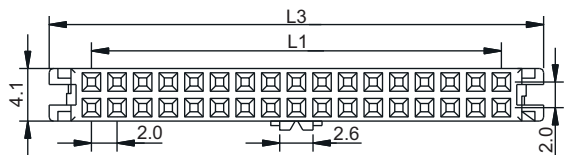

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 2.00$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 2.00 + 1.20$$

$$L3 = L2 + 3.40$$

Tolerances		
Linear	.X	± 0.38
	.XX	± 0.25

Part numbering guide

2204 I

08

B

Series
I = IDC female header

No. of contacts
08 to 50

Contact plating
T = Tin
B = Flashgold
M = Tin/flashgold

* standard

