

60706 Series

RJ12 Cat. 3 Coupler IDC Keystone Snap-IN

General specifications






Insulator material	PBT w/ 30% glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	100 mΩ max.
Insulator resistance	1000 MΩ min. @ 500 VDC
Dielectrical withstanding	750 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Mating parts series	



RoHS
compliant

Mechanical dimensions

Unit: mm

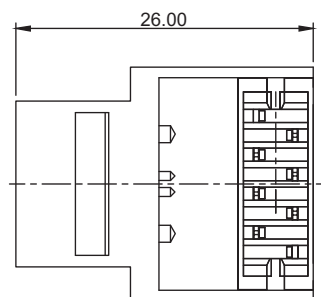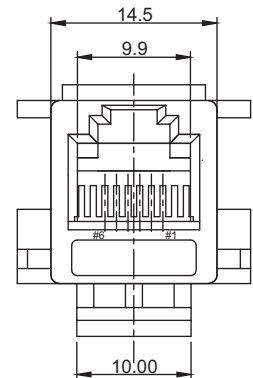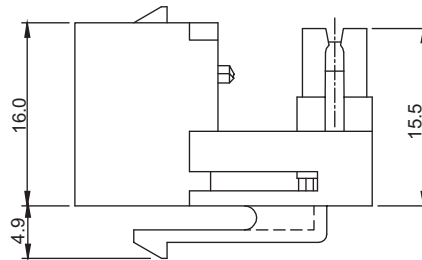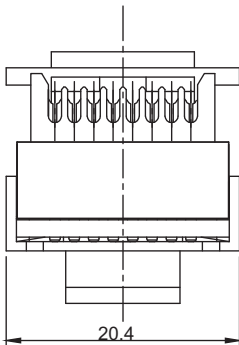

Tolerances		
Linear	X	± 0.20
	.XX	± 0.15
	.XXX	± 0.10

Part numbering guide

60706	C	4	B
Series	Contact plating C = 3 μ" gold D = 6 μ" gold	No. of contacts 4, 6	Color B = Black

* standard

