


2992 Series 1.25 mm FPC ZIF Socket

General specifications

Insulator material	Glass filled polyester, UL94V-0, color: nature
Contact material	Copper alloy
Current rating	1.0 A
Voltage rating	200 V AC/DC
Contact resistance	20 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series

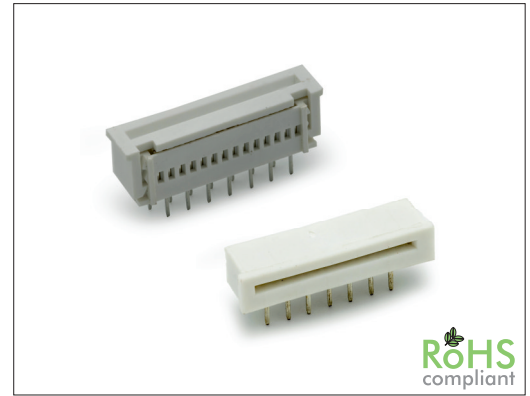


RoHS
compliant

Mechanical dimensions

Unit: mm


2992S

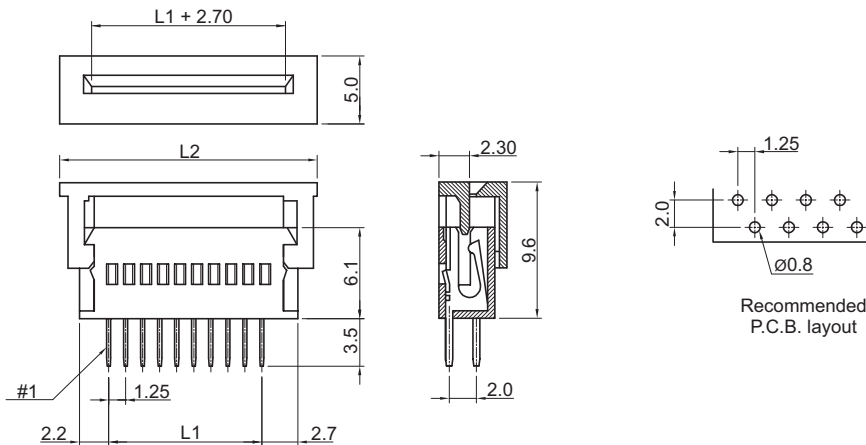

$$L1 = (\text{No. of contacts} - 1) \times 1.25$$

$$L2 = \text{No. of contacts} \times 1.25 + 5.80$$

2992U

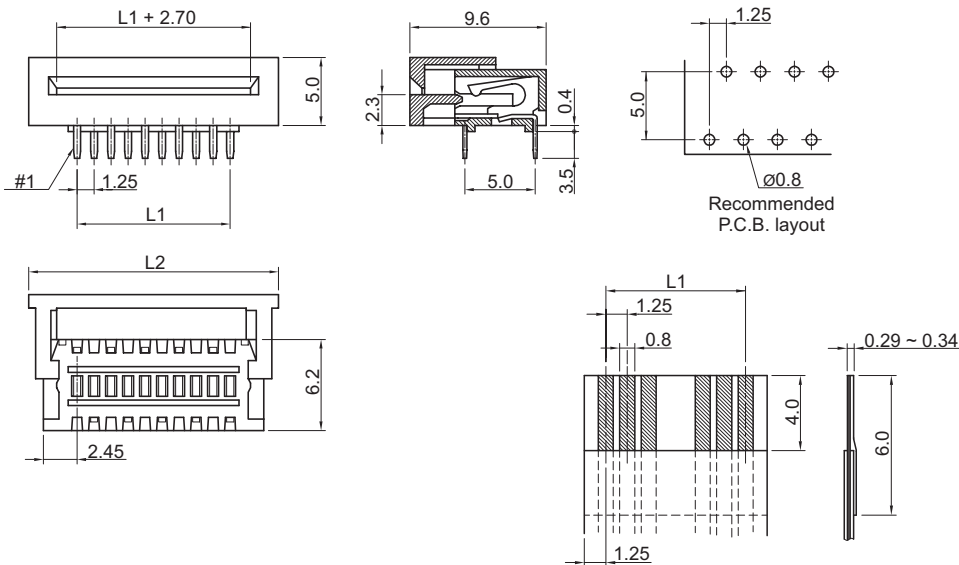

Accommodated FFC/FPC
Thickness: 0.30±0.03

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Part numbering guide

2992 S	03	T	T
Series S = THT straight U = THT right angle up contact	No. of contacts 03 to 32	Contact plating T = Tin	Packing T = Tube

* standard

