


65321 Series RJ45 10P Side Entry Shielded

General specifications

Insulator material	PA66, UL94V-0, color: black
Contact material	Phosphor bronze, plating: gold over nickel
Current rating	1.5 A
Voltage rating	150 VAC
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min. @ 500 VDC
Dielectrical withstandig	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	JEDEC lead free wave soldering process
Durability	750 cycles


Mating parts series

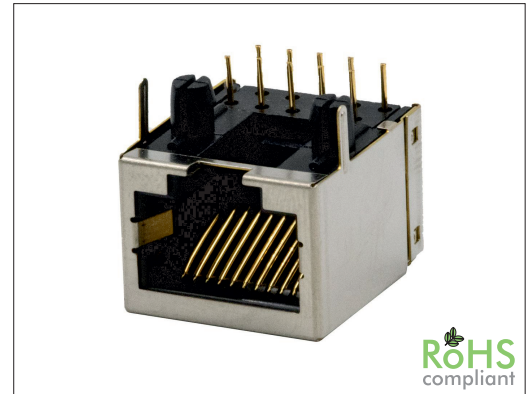

RoHS
compliant

Mechanical dimensions

Unit: mm

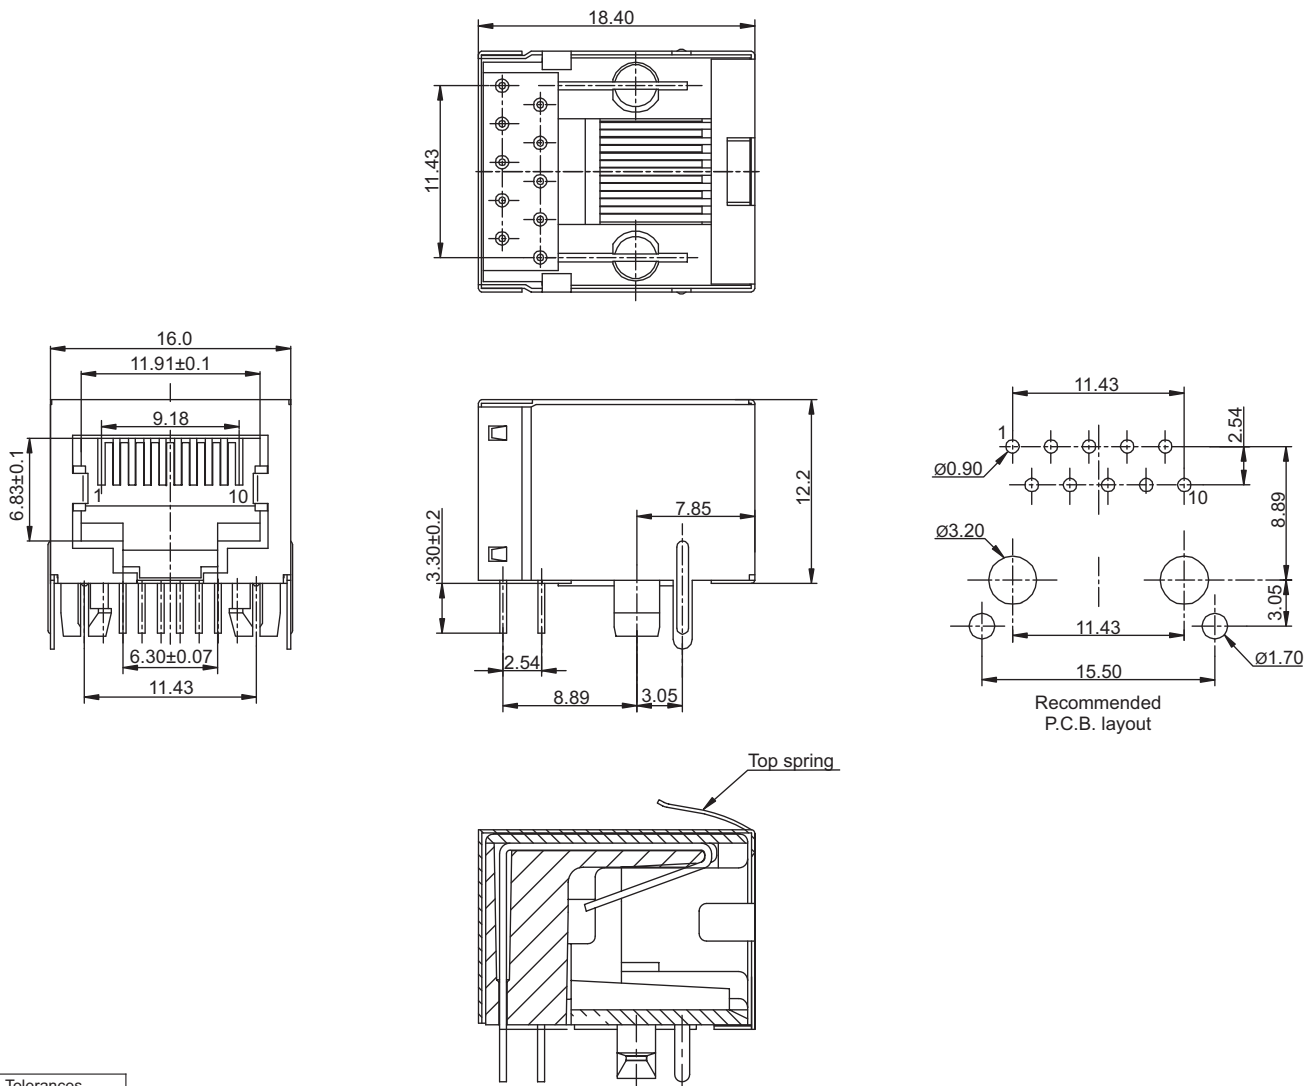

Tolerances		
Linear	X	± 0.20
	.XX	± 0.15

Part numbering guide

65321	C	8	0
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold	No. of contacts 8 = 8 contacts 1 = 10 contacts	Ground spring 0 = w/o spring 1 = top spring

* standard

