




Series 43064 Dual Mini DIN - 6x RCA Jack Combination

Material




Housing: PBT + Glass fiber
 Mini DIN Term.: Phosphor bronze, tin plated
 RCA Term.: Brass, tin plated
 Shield: Brass, nickel plated

Electrical

Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 250 VAC/minute
 Operating temperature: -25°C ~ +70°C
 Durability: 100 cycles

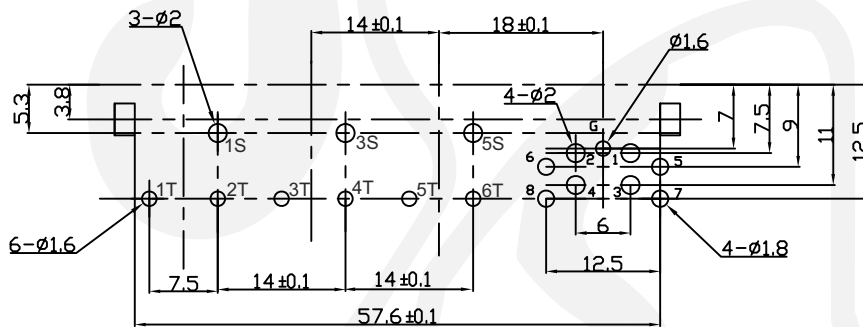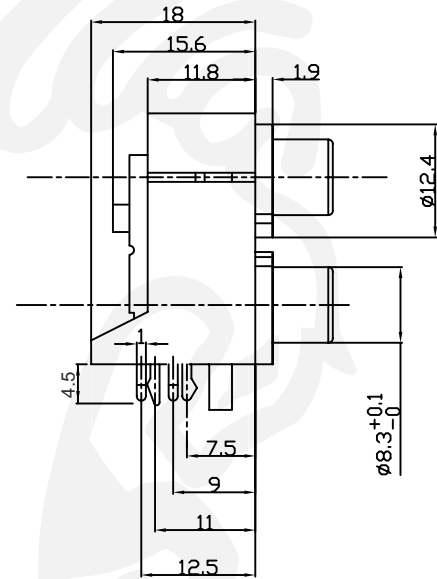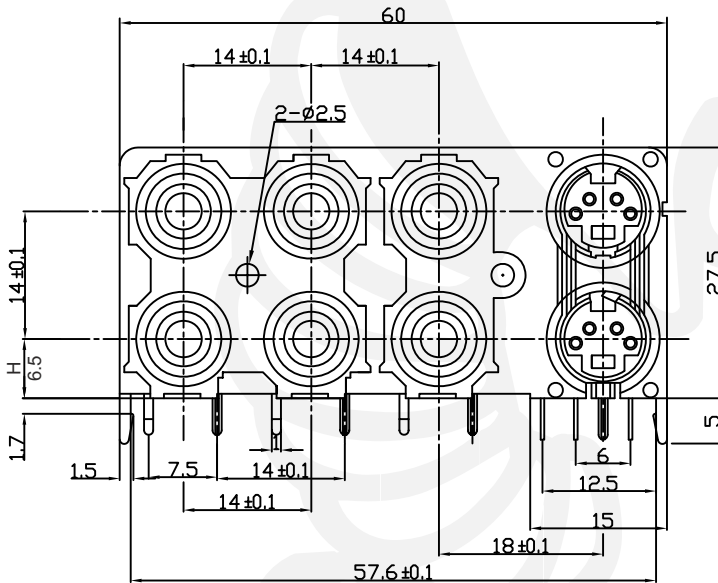

Recommended P.C.B. Layout
Bottom View

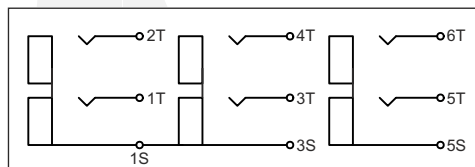

Tolerances	
Linear	<6 ± 0.1
	6-20 ± 0.2
	>20 ± 0.3



All dim. in mm

43064 Z — **01**

Series
43064Z

Color code
 01 = black
 02 = red
 03 = white
 04 = blue

05 = green
 06 = orange
 07 = yellow

Packing
Tray