


1435 Series

2.00 mm SMT Board Spacer Dual Row w/ position pegs


General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	2 A
Contact resistance	20 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process
Mating parts series	
1370, 1373, 1375, 1376, 1377, 1470, 1471, 1472, 1474, 1475, 1476, 1480	

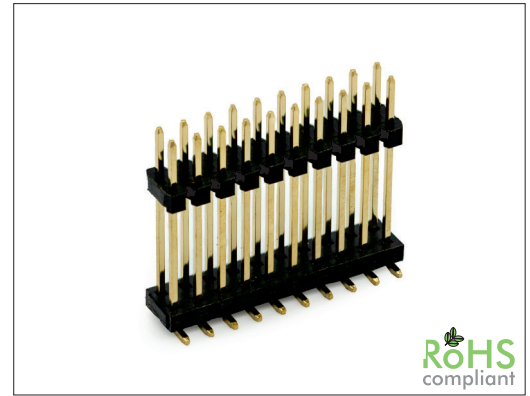

Mechanical dimensions

Unit: mm

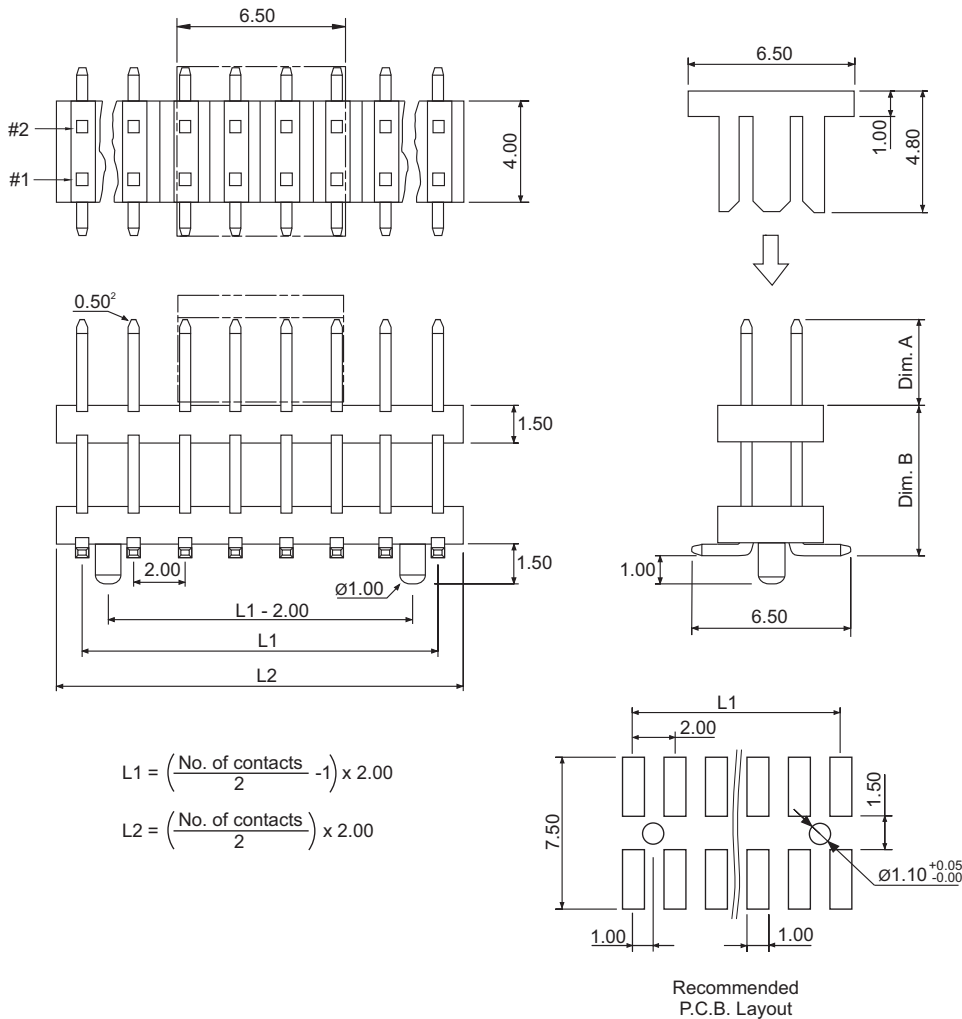

Ordercode dimensions		
Index	Dim. A	Dim. B
00	5.80	6.60
01	5.80	13.00
02	4.00	12.60
03	5.80	17.00
04	4.10	5.70
05	5.00	12.60
06	4.00	10.50
07	5.80	10.50
08	6.50	6.00
09	2.40	10.00
other pin length on customer request		

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Part numbering guide

1435 V — 04 — B — R — 00

Series V = SMT vertical
 No. of contacts 04 to 80
 Contact plating B = Flashgold
 E = 10 μ" gold
 F = 15 μ" gold
 J = 30 μ" gold
 Packing with pick & place pad R = Reel (max. total header height 20 mm)
 T = Tube
 Dimensions index see table

* standard

