

# 1434 Series


# 2.00 mm SMT Board Spacer Dual Row

## General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	2 A
Contact resistance	20 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process


## Mating parts series

1370, 1373, 1375, 1376, 1377, 1470, 1471, 1472, 1474, 1475, 1476, 1480

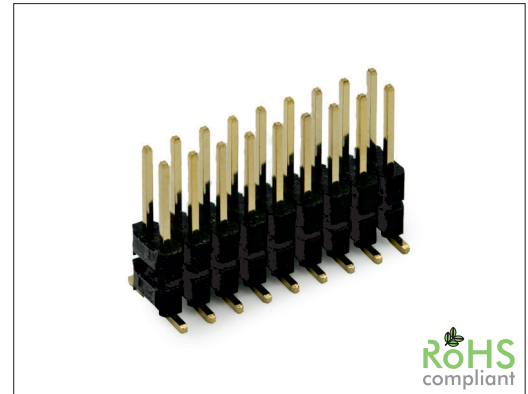

## Mechanical dimensions

Unit: mm

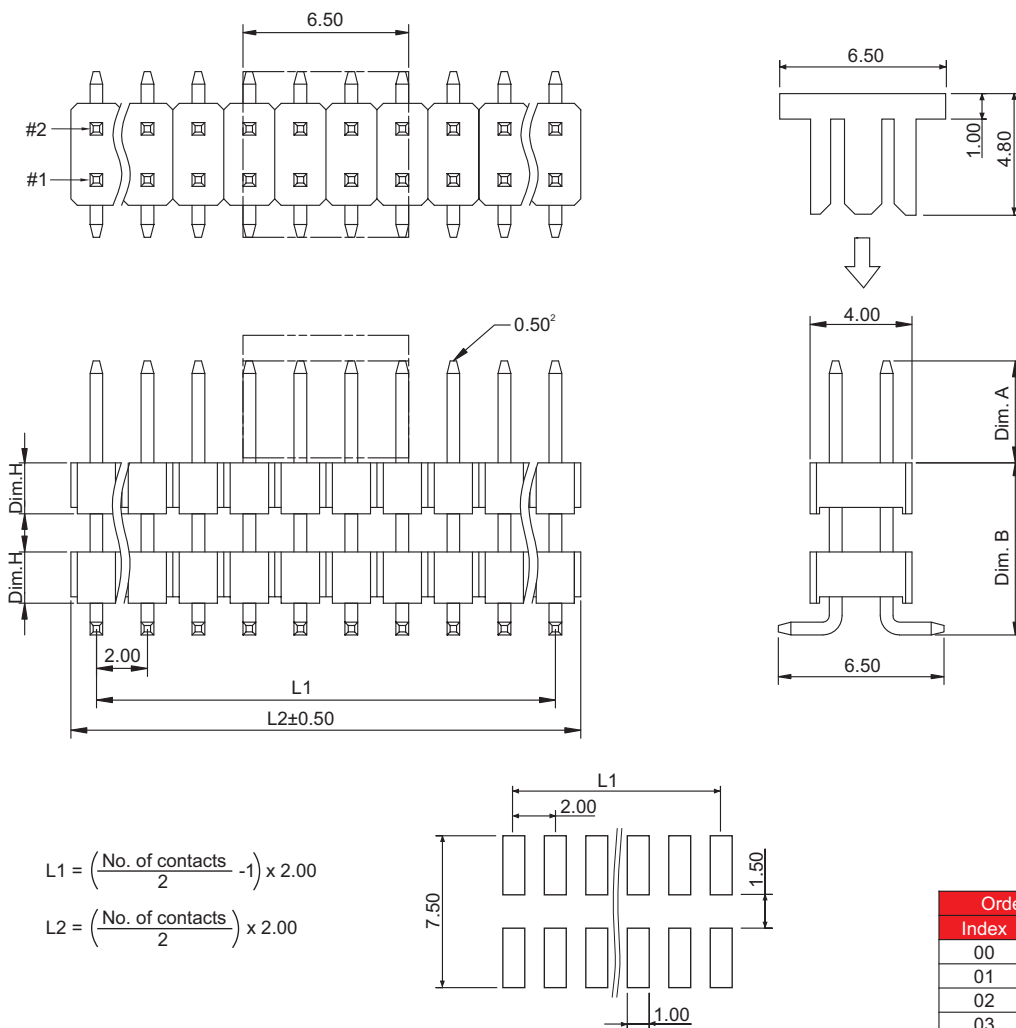

$$L1 = \left( \frac{\text{No. of contacts}}{2} - 1 \right) \times 2.00$$

$$L2 = \left( \frac{\text{No. of contacts}}{2} \right) \times 2.00$$

Ordercode dimensions		
Index	Dim. A	Dim. B
00	5.80	6.60
01	3.51	6.35
02	3.00	5.65
03	5.00	5.40
04	3.53	4.32
05	3.60	25.60
06	5.60	4.32

other pin length on customer request

Tolerances		
Linear	.X	± 0.38
	.XX	± 0.25

## Part numbering guide



Series V = SMT vertical	No. of contacts 04 to 80	Contact plating B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	Dimensions Dim. H 2 = 1.50 mm 3 = 2.00 mm	Packing with pick & place pad R = Reel (max. total header height 20 mm) T = Tube	Dimensions index see table
----------------------------	-----------------------------	--	---	--	-------------------------------

\* standard

