


Series 43082 Mini DIN - 3x RCA Jack Combination Top Entry

Material

Housing: PBT + Glass fiber
 Mini DIN Term.: Phosphor bronze, tin plated
 RCA Term.: Brass, tin plated
 Shield: Brass, nickel plated

Electrical



Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 250 VAC/minute
 Operating temperature: -25°C ~ +70°C
 Durability: 100 cycles

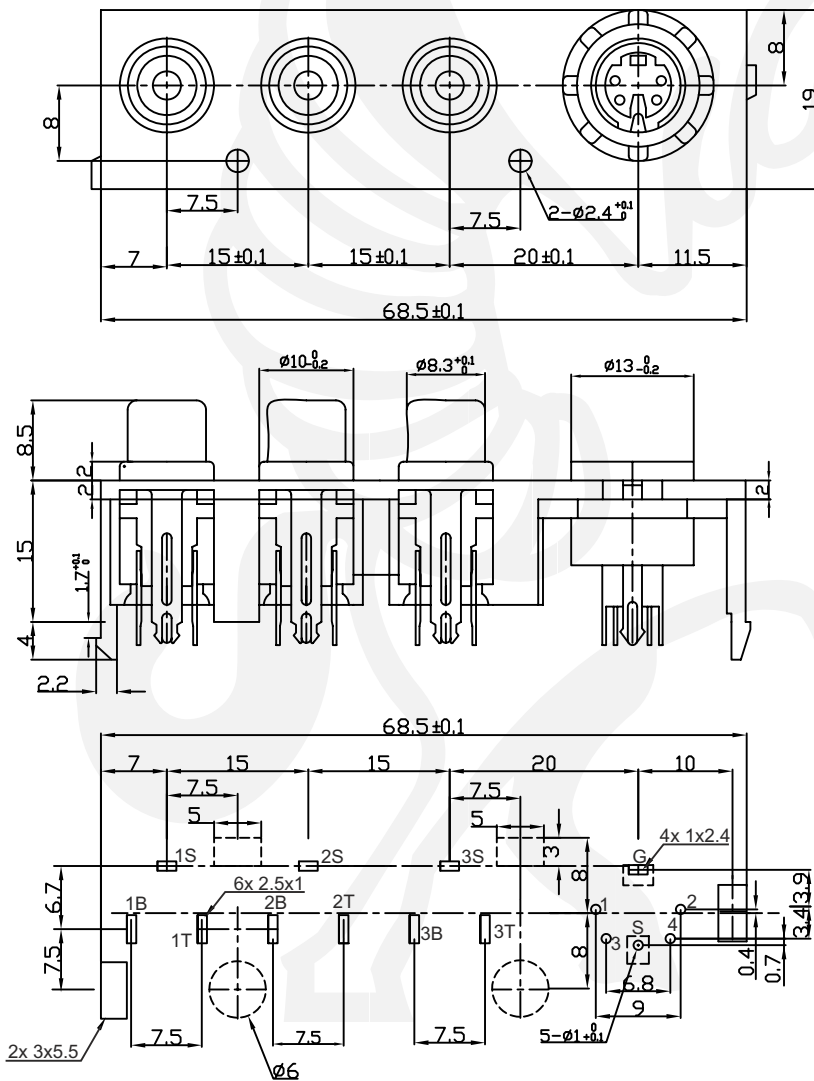

Color layout



Code	A	B	C
01	white	red	yellow
02	yellow	white	red
03	white	red	orange
04	orange	white	red
05	red	blue	green
06	yellow	blue	green
07	yellow	red	white
08	black	red	white
09	t.b.d. by customer		



Recommended P.C.B. Layout
Bottom view

Tolerances	
Linear	<6 ± 0.1 6-20 ± 0.2 >20 ± 0.3



All dim. in mm

43082 Z — **01**

Series 43082Z Color code see table Packing Tray