49301 Series F Female Right Angle Full Metal

General specifications	
Insulator material	Polypropylene
Washer material	Nylon PA9T
Center contact material	Brass, plating: nickel
Housing material	Brass, plating: nickel
Insulator resistance	500 MΩ min.
Contact resistance	20 mΩ max.
Impedance	75 Ω
VSWR	1.2 max. 0 to 1500 MHz

Mating parts series



RoHS compliant

Mechanical dimensions

Unit: mm

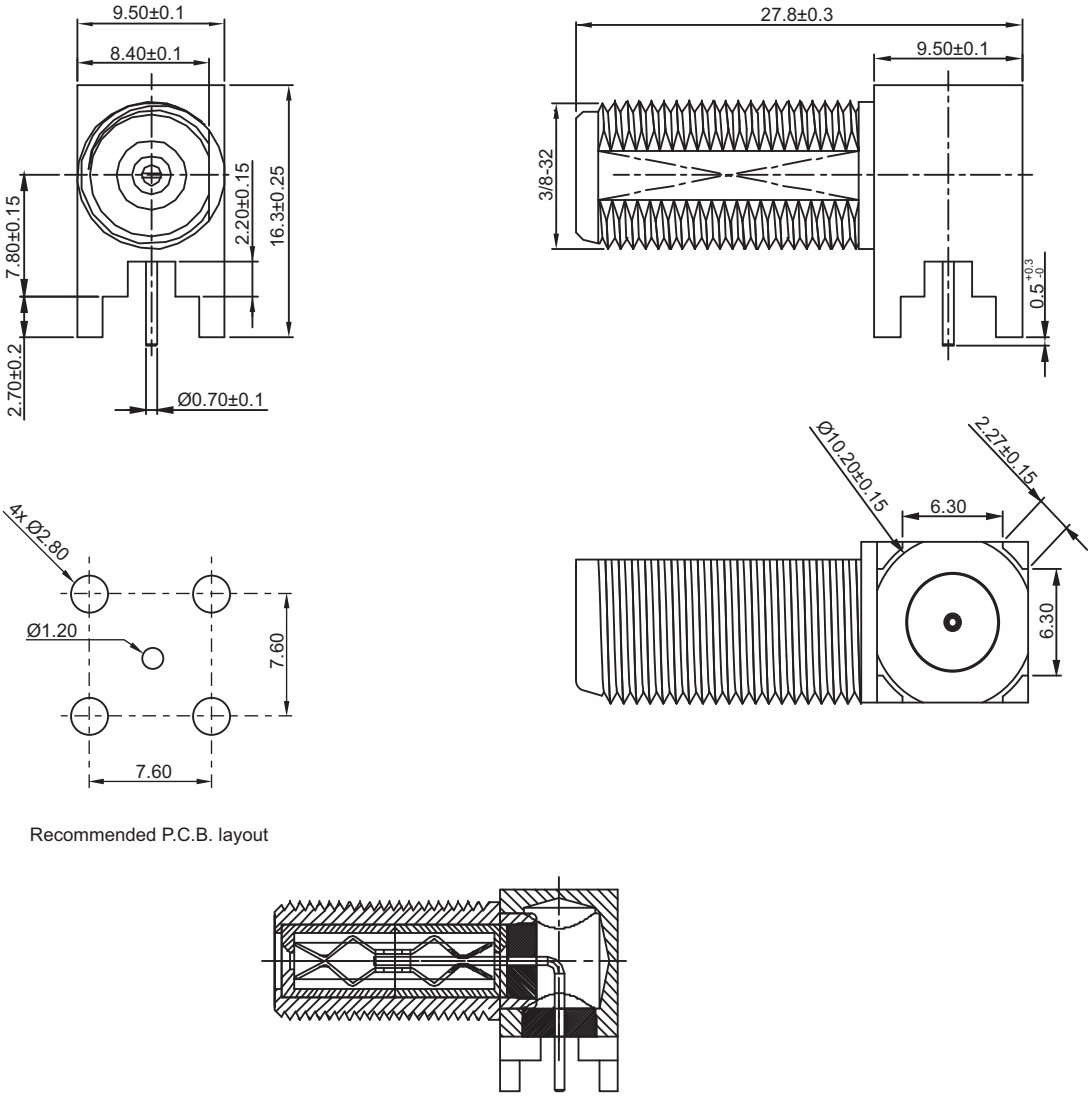

Recommended P.C.B. layout

Tolerances		
Linear	< 6	± 0.20
	6 to 30	± 0.40
	> 30	± 0.60

Part numbering guide

49301

Series

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics