

1373 Series


2.00 mm Female Header Dual Row

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	2 A
Contact resistance	20 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to 105 °C
Soldering	Lead free wave soldering process

Mating parts series


1320, 1334, 1420, 1422, 1434, 1435



RoHS
compliant

Mechanical dimensions

Unit: mm

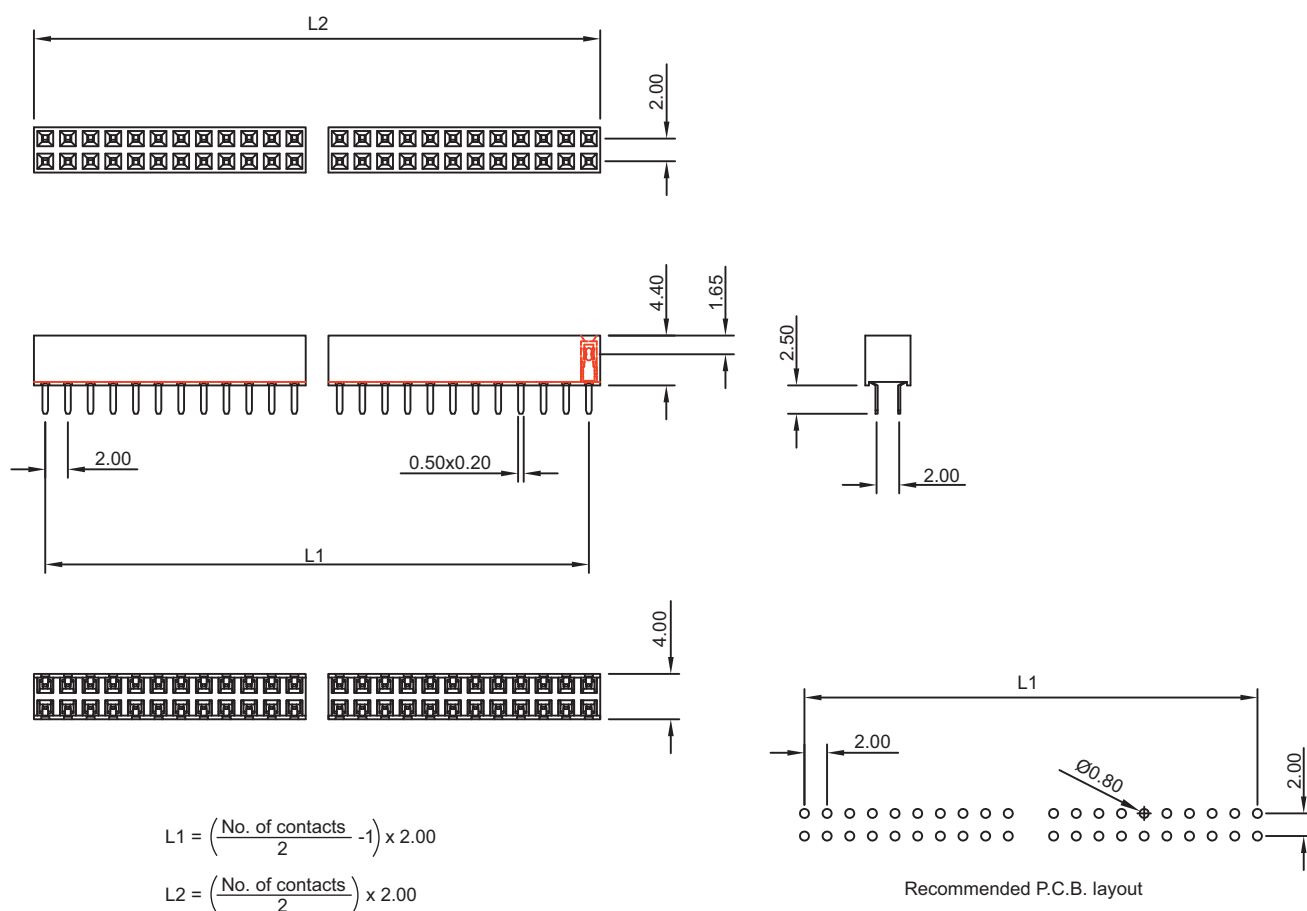

Tolerances

Linear	X	± 0.30
	.XX	± 0.20
	.XXX	± 0.10

Part numbering guide

1373 S	04	B
Series	No. of contacts	Contact plating
S = THT straight	04 to 80	B = Flashgold
		E = 10 μ" gold
		F = 15 μ" gold
		J = 30 μ" gold

* standard

