

1136 Series


1.27 x 1.27 mm Female Header Dual Row

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series






1104, 1157, 1158

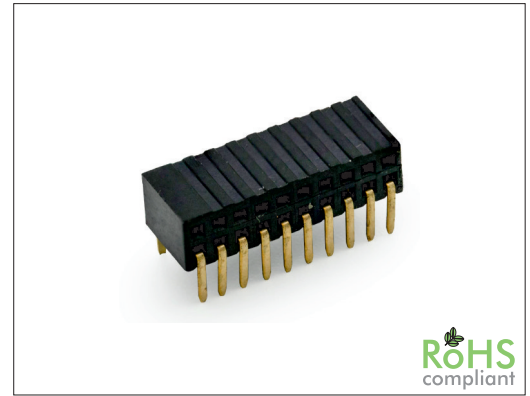

RoHS
compliant

Mechanical dimensions

Unit: mm

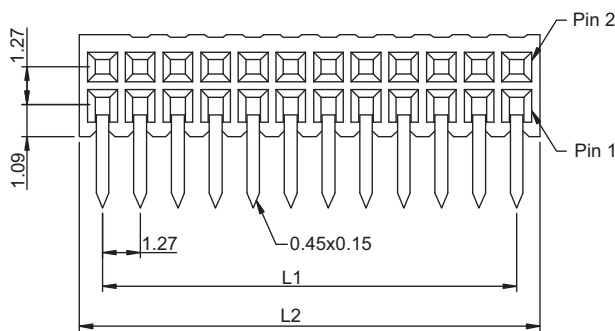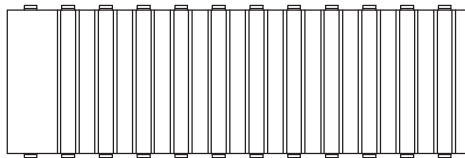

Three side contact terminal

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 1.27$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 1.27 + 0.40$$

Tolerances

Linear	X	± 0.38
	.XX	± 0.25

Part numbering guide

1136 R

06

B

Series

R = THT right angle

No. of contacts

06 to 100

Contact plating

B = Flashgold

E = 10 μm gold

F = 15 μm gold

J = 30 μm gold

* standard

