

2392 Series

3.96 mm WH Pin Header

General specifications

Insulator material	Nylon 66, color: nature or black
Contact material	Brass
Current rating	7 A
Voltage rating	250 V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1500 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process

Mating parts series






2392-PT or cable assembly








Mechanical dimensions

Unit: mm

2392S



2392R




L1 = (No. of contacts - 1) x 3.96

L2 = No. of contacts x 3.96

Tolerances	
Linear	.X ± 0.25
	.XX ± 0.15

Part numbering guide

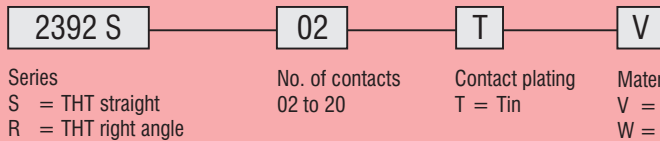

* standard

