


# 64006 Series SMT RJ45 8P Top Entry

## General specifications

Insulator material	High temperature plastic, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process
Durability	750 cycles


## Mating parts series

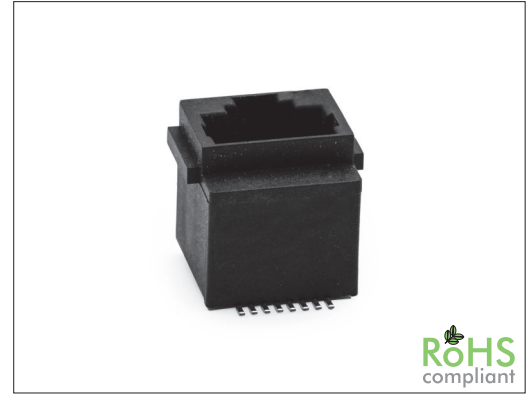

RoHS  
compliant

## Mechanical dimensions

Unit: mm

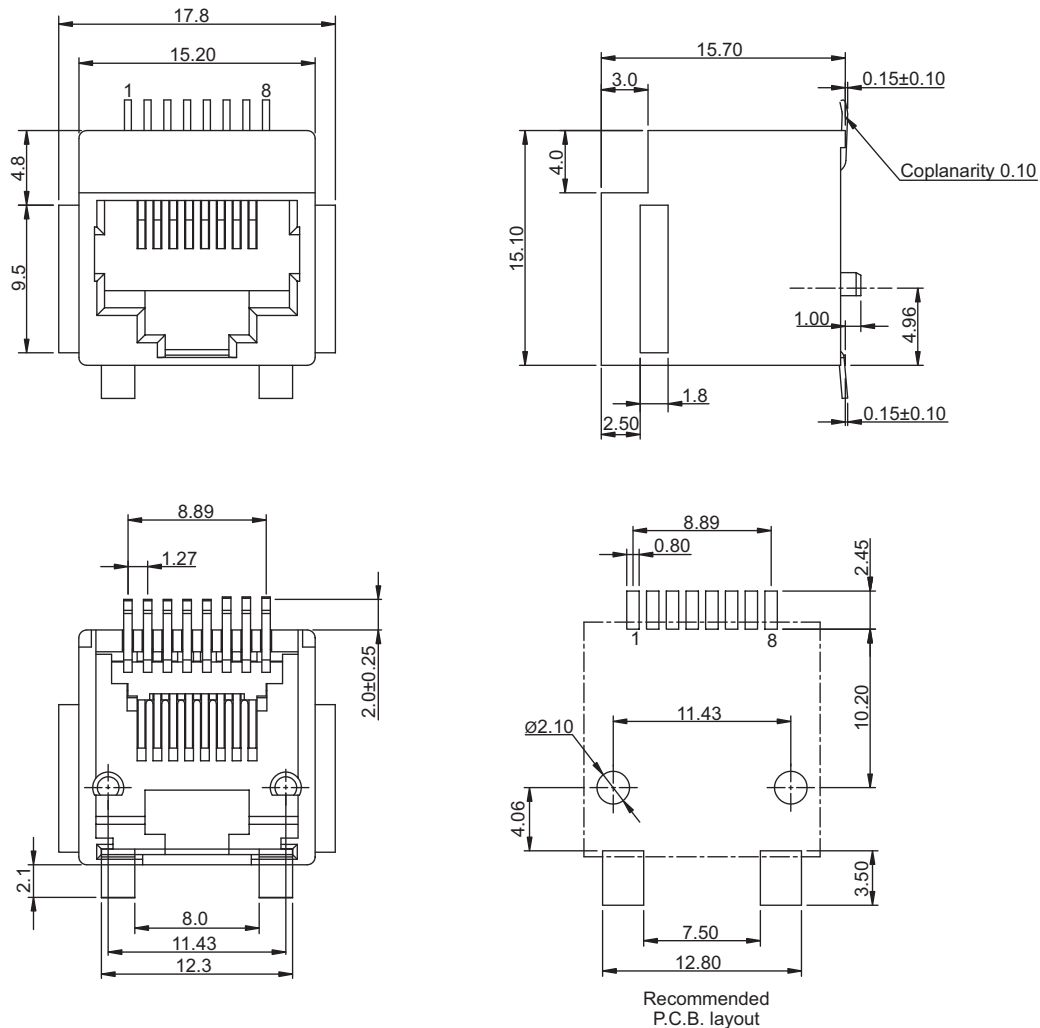

Tolerances		
Linear	X	± 0.20
	.XX	± 0.15
	.XXX	± 0.10

## Part numbering guide

64006	C	1
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold	Panel stop K = 50 μ" gold 1 = w/ panel stop

\* standard

