


# 2251 Series

# 2.50 mm Housing and Terminal

### General specifications


Insulator material	Nylon 66, UL94V-0, color: natural
Contact material	Brass
Current rating	3 A
Volage rating	250 V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	800 VAC for 1 min
Operating temperature	-25 °C to +85 °C
<b>Mating parts series</b>	
2251-SR	

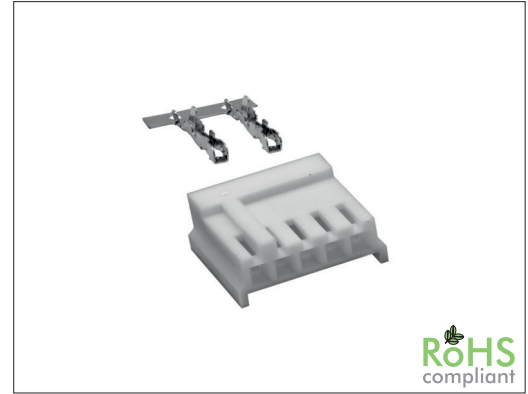

### Mechanical dimensions


2251P

Unit: mm

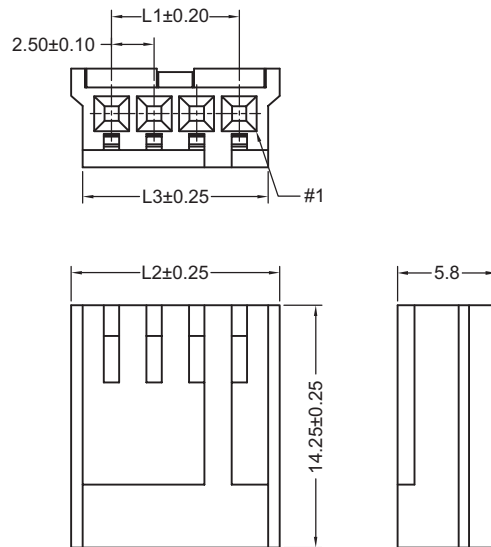

L1 = No. of contacts x 2.50 - 2.50  
 L2 = No. of contacts x 2.50 + 2.25  
 L3 = No. of contacts x 2.50 + 0.90


2251T

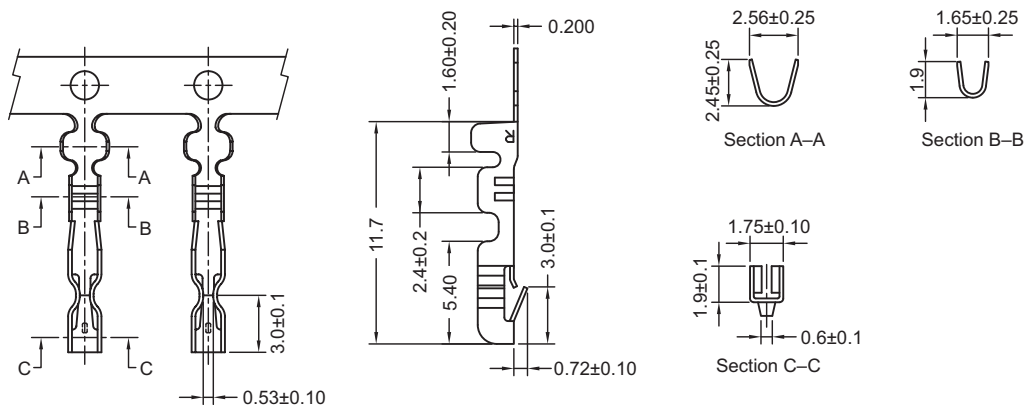

Wire range: AWG 20 to 26

Tolerances		
Linear	X	± 0.25
	.XX	± 0.15
	.XXX	± 0.05

### Part numbering guide

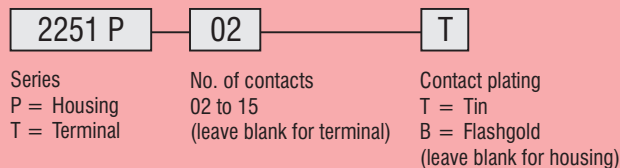

\* standard

