


# 5105 Series

# Battery Holder for CR2032

## General specifications

Insulator material	PBT, UL94V-0, color: black
Contact material	Stainless steel
Current rating	3 A
Voltage rating	500 V AC/DC
Contact resistance	100 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	500 VDC for 1 min
Operating temperature	-55 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	50 cycles


## Mating parts series

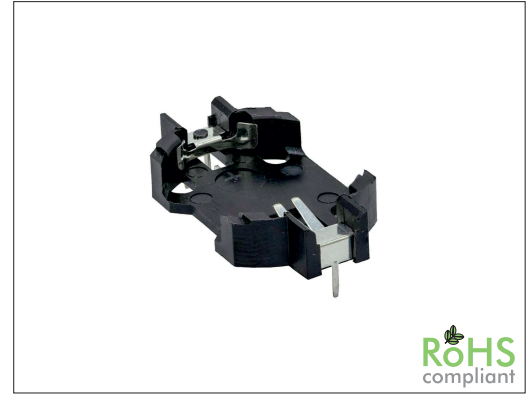

RoHS  
compliant

## Mechanical dimensions

Unit: mm

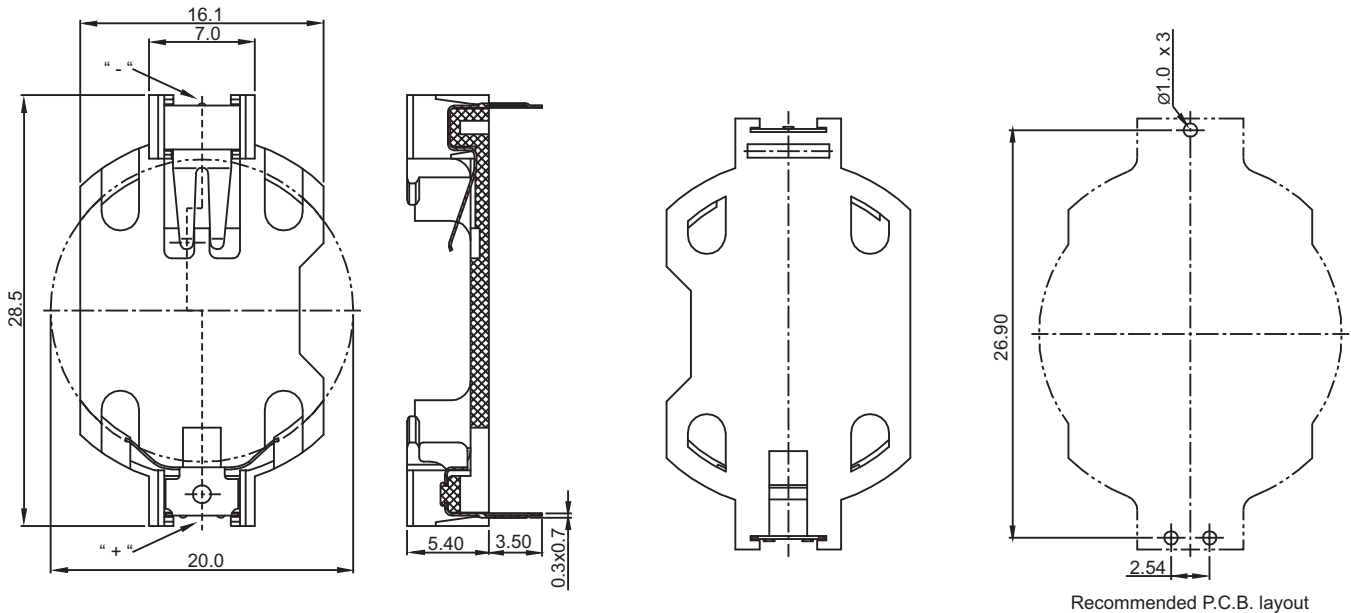

Tolerances		
Linear	X	± 0.30
	.XX	± 0.20
	.XXX	± 0.10

## Part numbering guide

5105P — T

Series

Contact plating

T = Tin

\* standard

