

6480X Series

Multiport RJ45 8P Side Entry

General specifications

Insulator material	High temperature plastic , UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

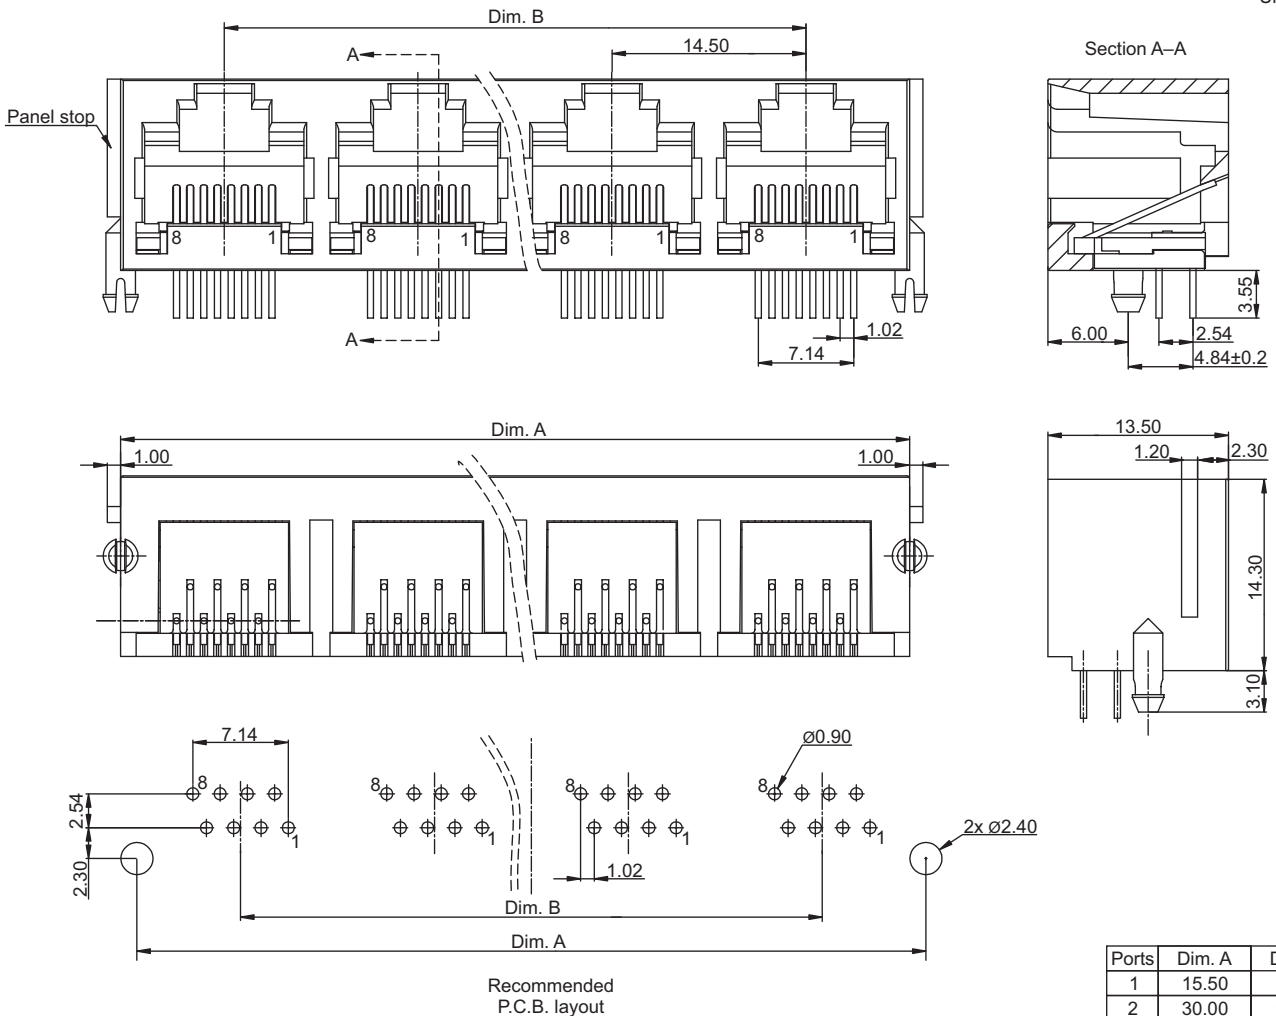

Tolerances		
Linear	X	± 0.25
	.XX	± 0.20
	.XXX	± 0.10

Part numbering guide

6480	A	C	1
Series	Ports	Contact plating	Panel stop
	A = 1 E = 5	C = 3 μ" gold K = 50 μ" gold	0 = w/o panel stop
	B = 2 F = 6	D = 6 μ" gold	1 = w/ panel stop
	C = 3 H = 8	F = 15 μ" gold	
	D = 4	J = 30 μ" gold	

* standard

