49374 Series Adapter F Male to F Female Right Angle

General specifications	
Insulator material	Polypropylene, Delrin
Housing material	Brass, plating: nickel
Contact material	Brass, plating: nickel
Contact resistance	20 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	1200 VAC for 1 min
VSWR	1.2 max. 0 to 1500 MHz
Impedance	75 Ω

RoHS compliant

Mechanical dimensions

Unit: mm

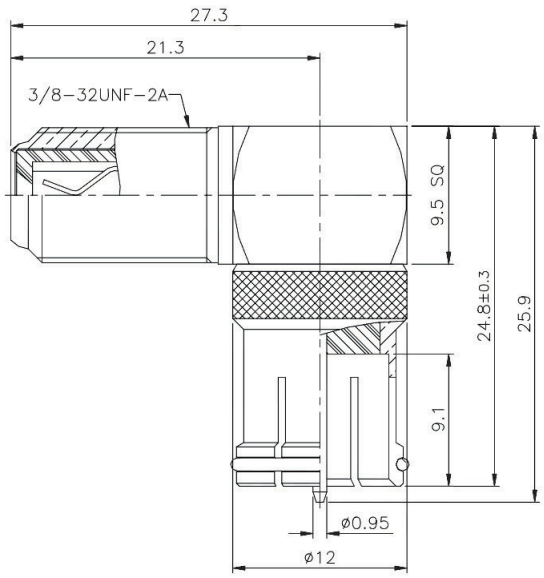

Tolerances		
Linear	.X	± 0.30
	.XX	± 0.10

Part numbering guide

49374

Series

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics