

1378 Series


2.00 mm Female Header Dual Row Side Entry

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	2 A
Voltage rating	125 V AC/DC
Contact resistance	20 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to 105 °C
Soldering	JEDEC lead free pin in paste reflow soldering process





Mating parts series

1426 (4.5 mm height only)

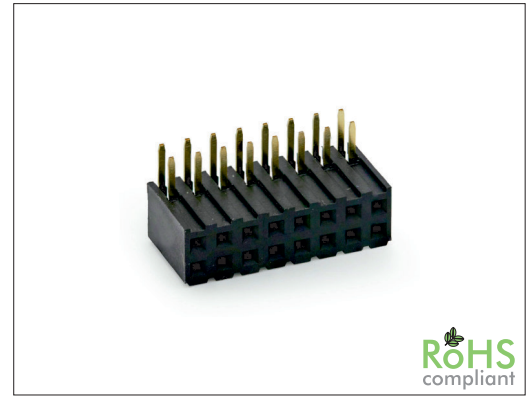

Mechanical dimensions

Unit: mm

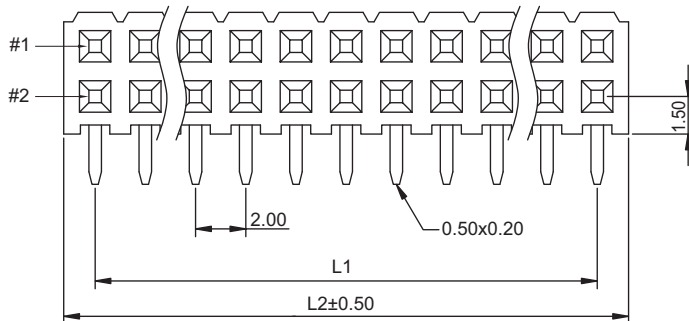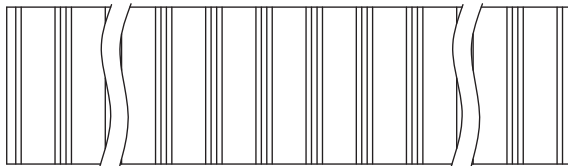

L1 = No. of contacts - 2.00
L2 = No. of contacts + 0.50

Tolerances		
Linear	.X	± 0.38
	.XX	± 0.25

Part numbering guide



Series R = THT right angle	No. of contacts 04 to 80	Contact plating B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	Packing option R = Reel w/ mylar foil (Leave empty for tray)
-------------------------------	-----------------------------	--	--

* standard

