


# 61114 Series RJ10 4P Top Entry

## General specifications

Insulator material	PBT, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


## Mating parts series

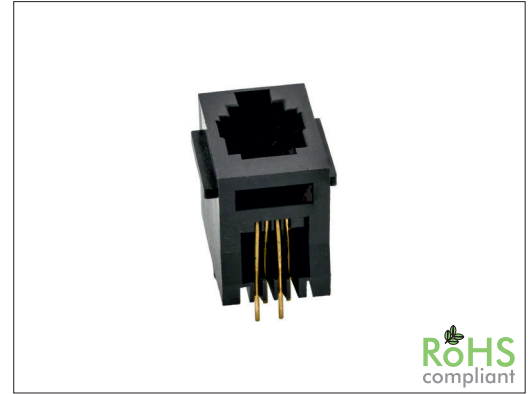

RoHS  
compliant

## Mechanical dimensions

Unit: mm

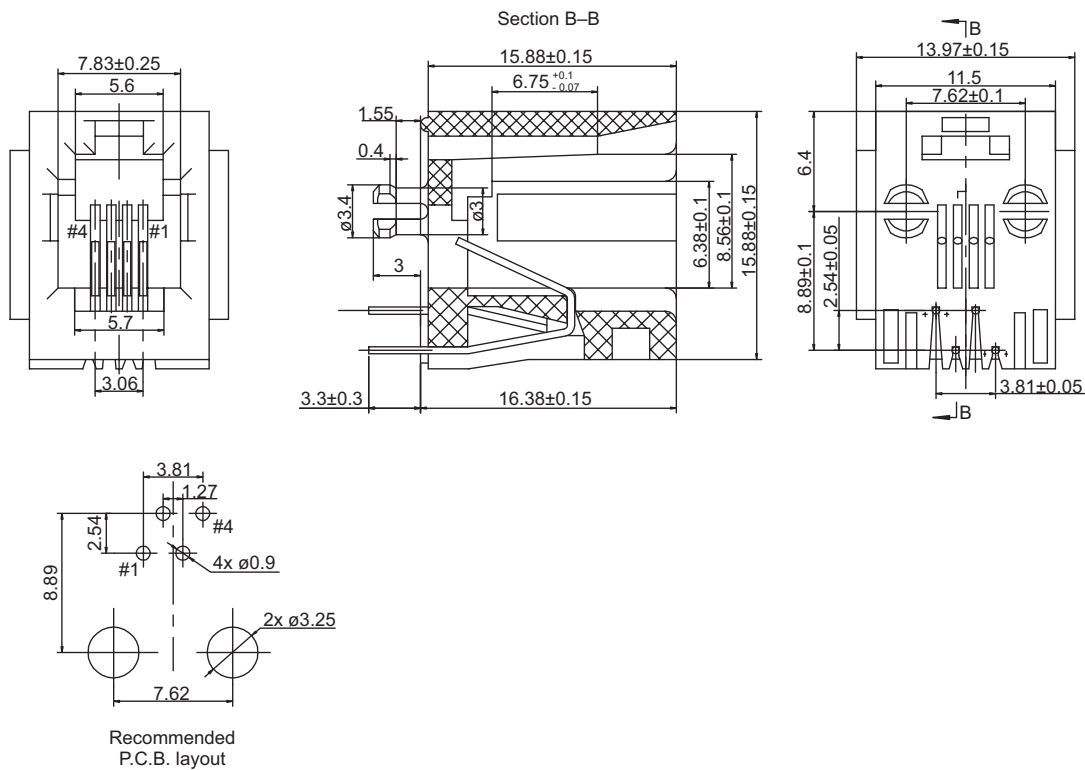

Tolerances		
Linear	X	± 0.25
	.XX	± 0.20
	.XXX	± 0.10

## Part numbering guide

61114	C	1
Series	Contact plating	Panel stop
	C = 3 μ" gold    K = 50 μ" gold	0 = w/o panel stop
	D = 6 μ" gold	1 = w/ panel stop*
	F = 15 μ" gold	
	J = 30 μ" gold	

\* standard

