


62120 Series RJ11 / RJ12 Top Entry

General specifications

Insulator material	Polyester w/ glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


Mating parts series

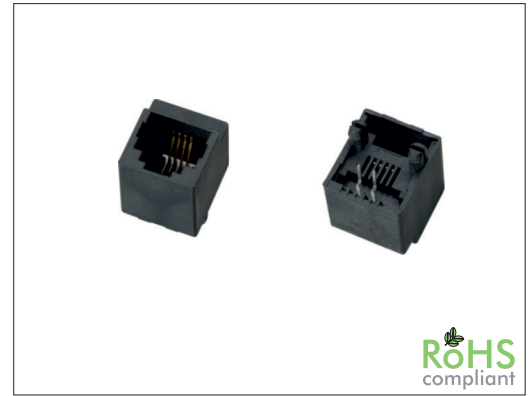

RoHS
compliant

Mechanical dimensions

Unit: mm

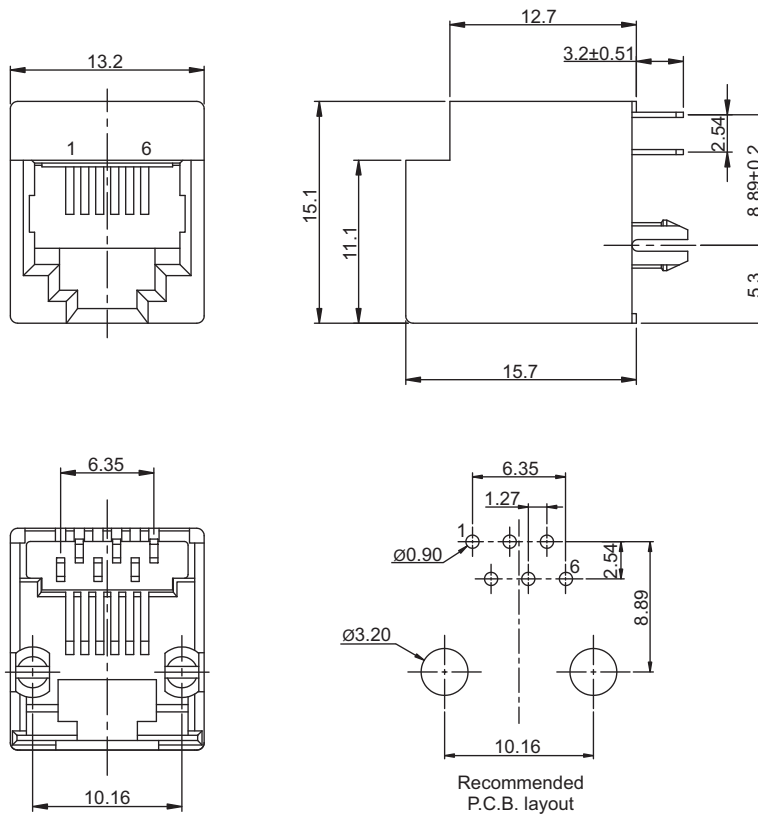

Tolerances		
Linear	X	± 0.25
	.XX	± 0.15
	.XXX	± 0.10

Part numbering guide

62120	C	6
Series	Contact plating C = 3 μ" gold J = 30 μ" gold D = 6 μ" gold K = 50 μ" gold F = 15 μ" gold	No. of contacts 4, 6

* standard

