

49300 Series F Female Right Angle

General specifications


Insulator material	Polypropylene, UL94-HB, color: transparent
Bracket material	C.R.S., plating: tin
Center pin material	Phosphor bronze, plating: tin
Terminal material	Brass, plating: tin
Body material	Brass, plating: nickel
Impedance	75 Ω
Frequency range	50 MHz to 850 MHz
Contact resistance	20 m Ω max.
Insulator resistance	500 M Ω min. @ 500 VDC
Dielectrical withstanding	1200 VAC for 1 min
Soldering	Lead free wave soldering process



RoHS
compliant

Mechanical dimensions

Unit: mm

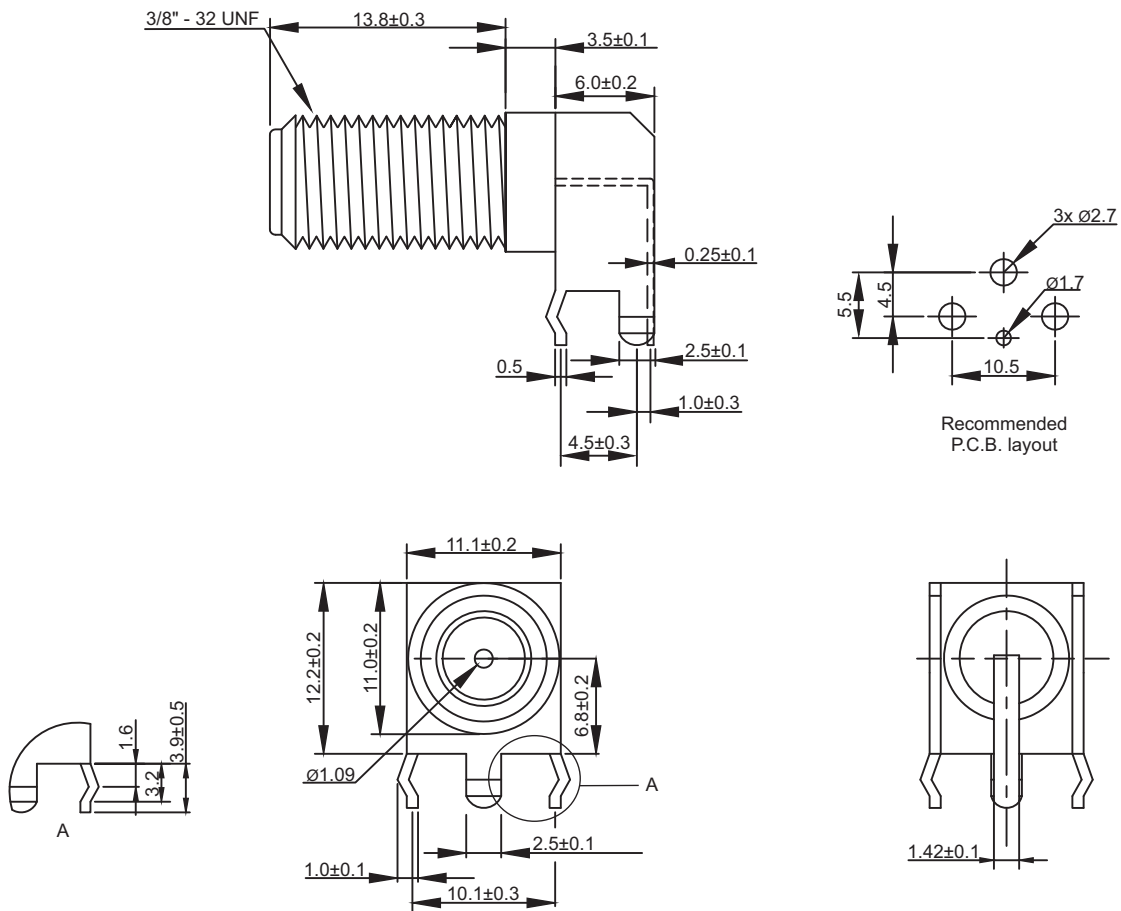

Tolerances	
Linear	$\pm$ 0.25

Part numbering guide

49300

Series

* standard

