

Series 43402 2x2 RCA Jack / Cinch


Material

Base, insulator: ABS
 Color washer: PBT + 15% glass fiber
 Contact break / needle: H65 Brass / QSn 6.5-0.1


Electrical

Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 500 VAC/minute
 Operating temperature: -40°C ~ +70°C
 Durability: 500 cycles


43402Z

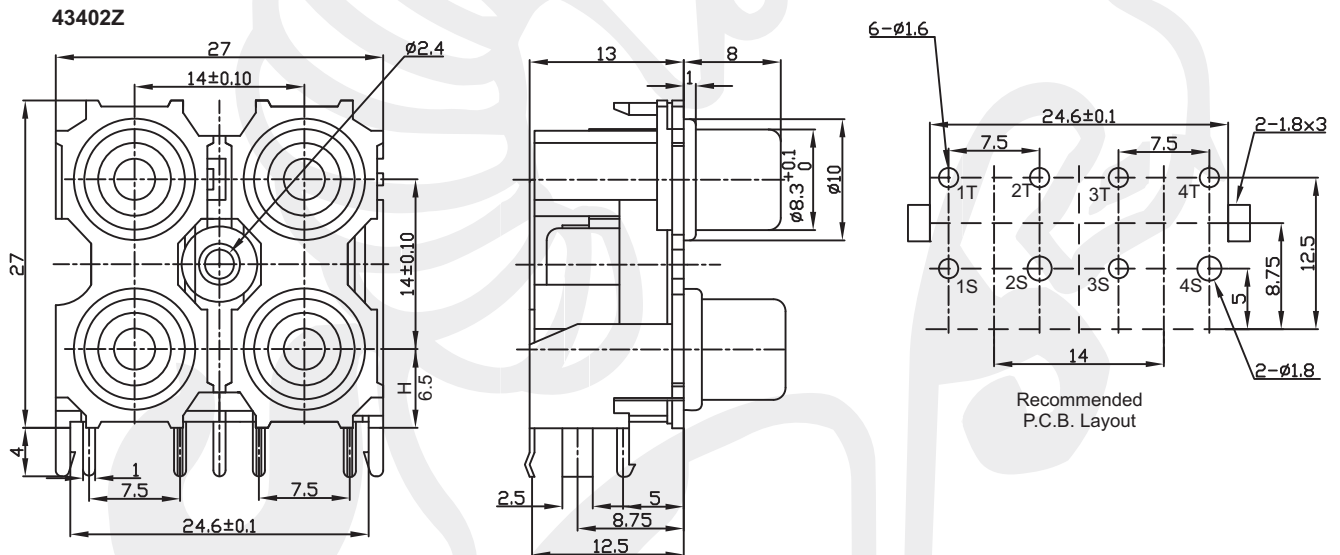

Color layout



Code	A	B
01	white	red
02	red	white
03	t.b.d. by customer	



Tolerances		
Linear	<6	± 0.1
	6~20	± 0.2
	>20	± 0.3

RoHS
compliant

All dim. in mm

43402 Z**01**

Series
43402Z
43402A



Color code
see table

Packing
Box

Series 43402

2x2 RCA Jack / Cinch

43402A

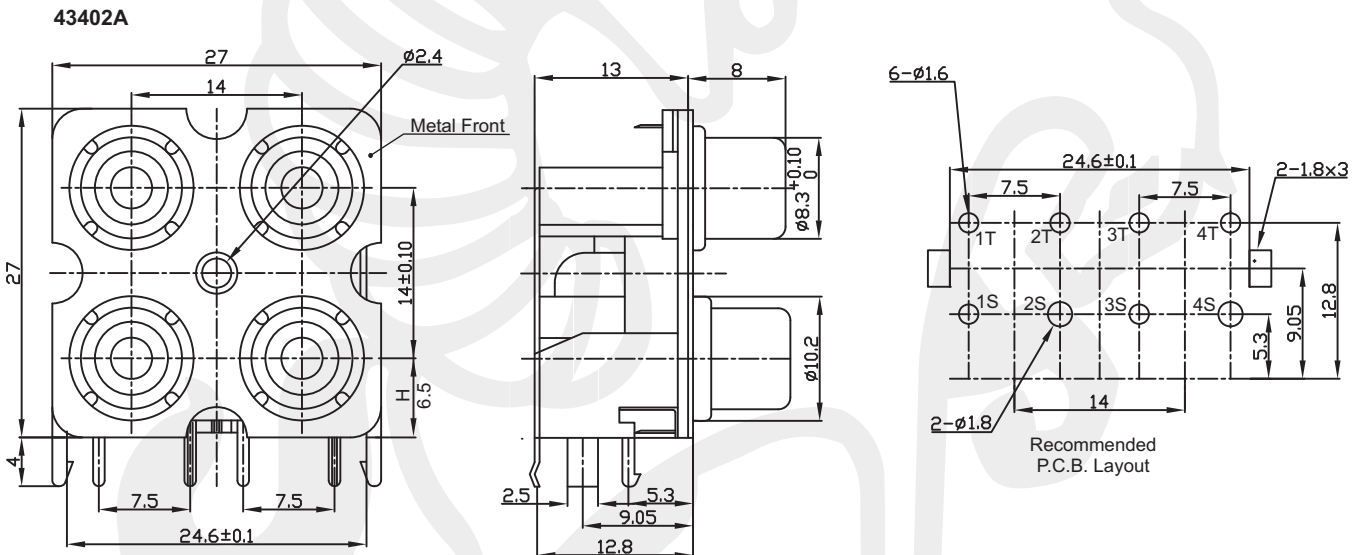

Tolerances	
Linear	$<6 \pm 0.1$ $6 \sim 20 \pm 0.2$ $>20 \pm 0.3$

 **RoHS**
compliant

All dim. in mm