

# 1232 Series


# 1.27 x 2.54 mm Female Header Dual Row

## General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process

## Mating parts series


1204, 1212, 1254, 1260

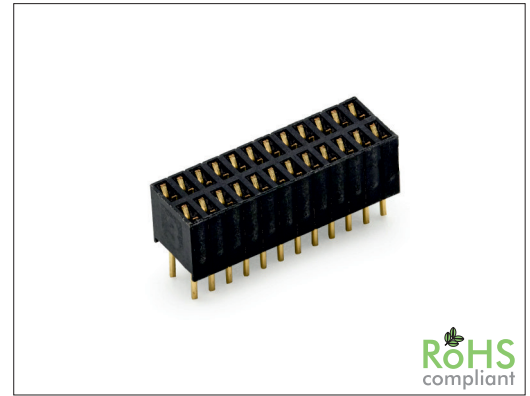

RoHS  
compliant

## Mechanical dimensions

Unit: mm

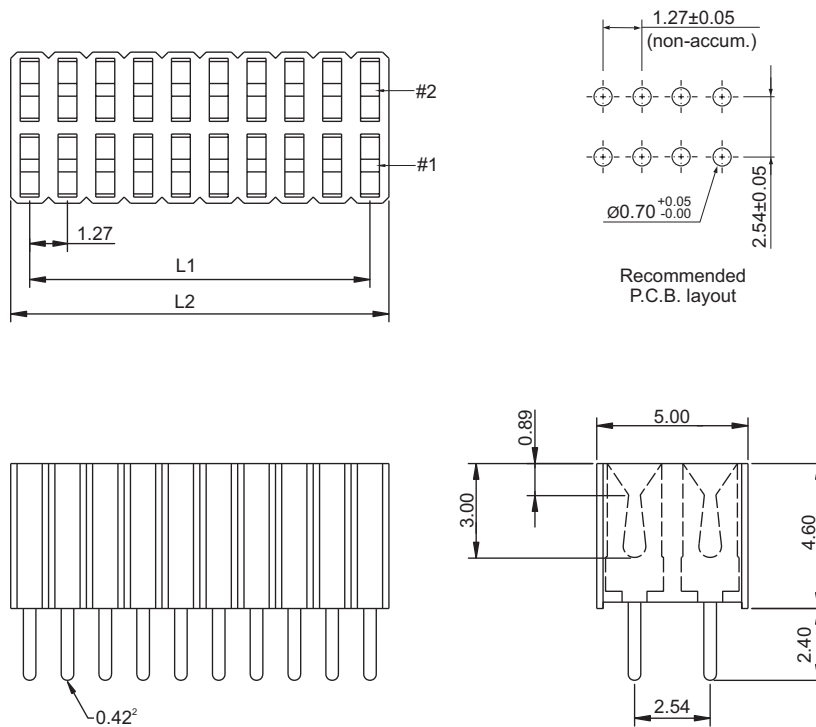

$$L1 = (\text{No. of contacts} - 1) \times 1.27$$

$$L2 = \text{No. of contacts} \times 1.27$$

### Tolerances

Linear	X	± 0.38
	.XX	± 0.25

## Part numbering guide

1232 S — 04 — B

Series  
S = THT straight

No. of contacts  
04 to 100

Contact plating  
B = Flashgold  
E = 10 μ" gold  
F = 15 μ" gold  
J = 30 μ" gold

\* standard

