

49753 Series MMCX Plug Straight Solder


General specifications

Insulator material	Teflon
Center contact material	Brass, plating: gold
Body material	Brass, plating: gold
Impedance	50 Ω
Frequency range	0 to 6 GHz
Contact resistance	Center: 5 m Ω max. / outer: 2.5 m Ω max.
Insulator resistance	1000 M Ω min.
Dielectrical withstanding	500 VAC
Operation temperature	-65 C to +155 C
Durability	500 cycles




Mechanical dimensions

Unit: mm

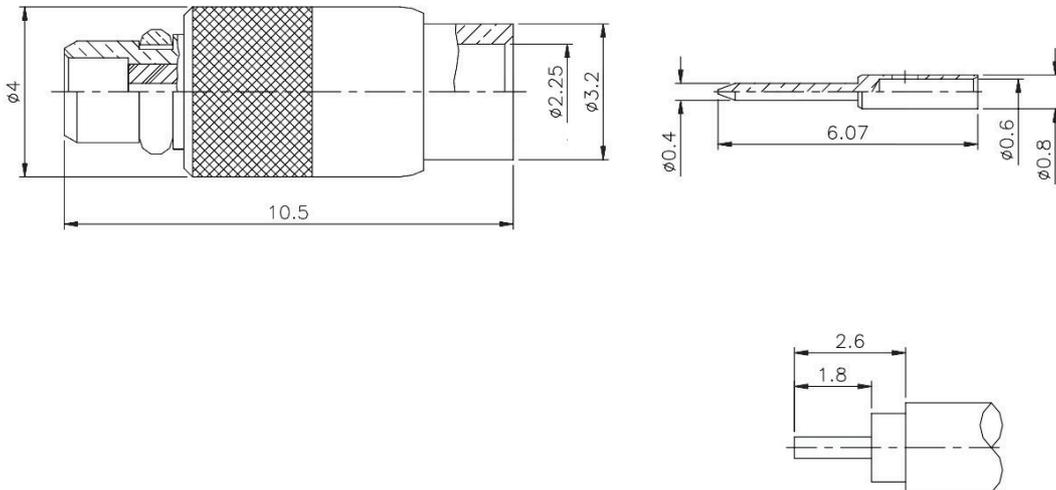

Tolerances	
Linear	<6 ± 0.2
	6 to 30 ± 0.4
	>30 ± 0.6

Part numbering guide



* standard

