


2908 Series

FFC Flat Flexible Foilcable w/ Board-In Pins / Female Header

General specifications


Insulation	Polyester, color: white
Conductor material	Tinned copper
Conductor resistance	< 0.5 Ω/m
Insulation resistance	500 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-30 °C to +80 °C
Flexing test	More than 20 times at 18 °C
Mating parts series	
Type A & B mates w/ standard 2.54 mm pin headers	

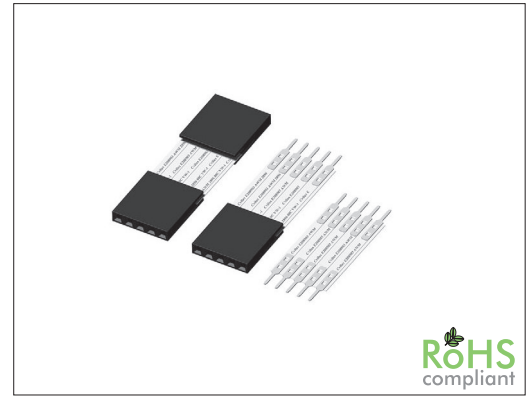


Mechanical dimensions

Unit: mm


Type A

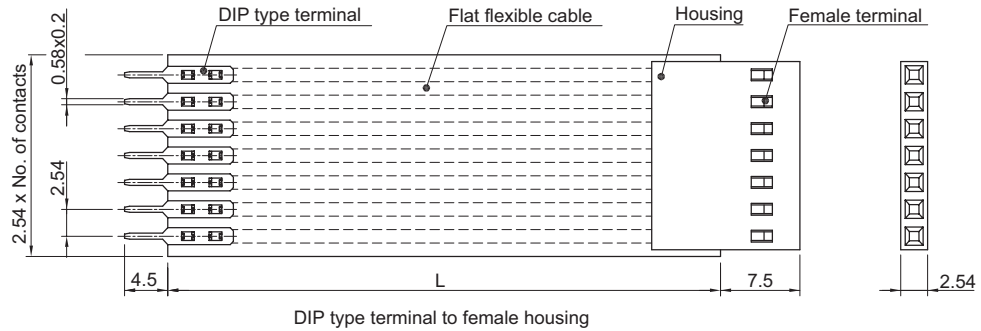

Type B

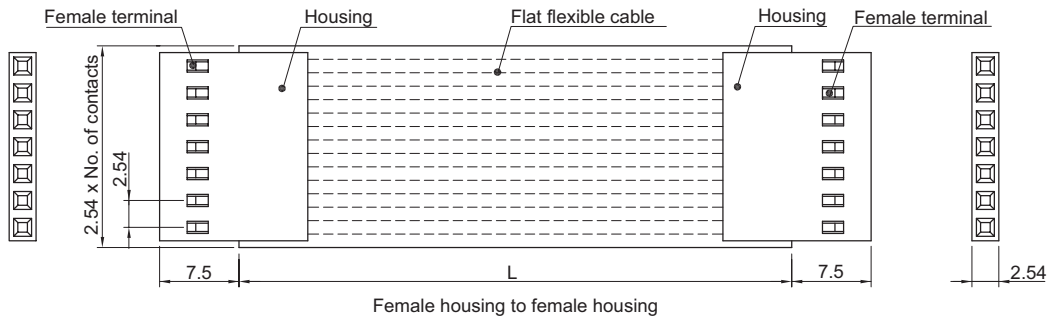


Type C

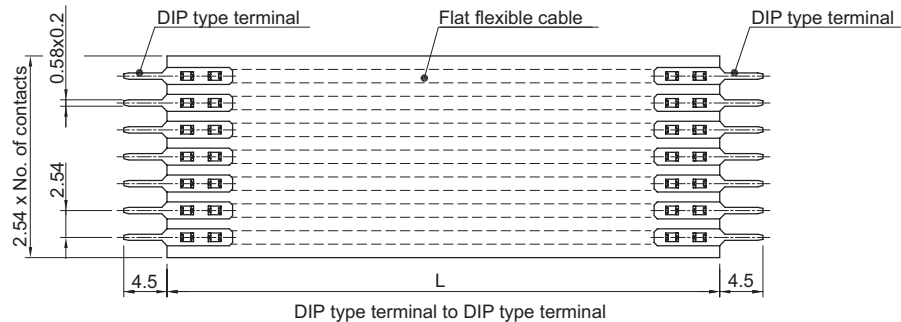

Tolerances	
Linear	X ± 0.38
	.XX ± 0.25

Part numbering guide

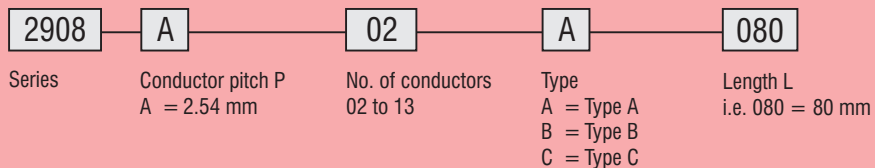

* standard

