

# 5974 Series

# AC Inlet Socket Solder Type w/ Fuseholder

### General specifications


Insulator material	Thermoplastic, UL94V-2 to UL94V-0
Fuseholder suitable	5 x 20 mm fuse (not included)
Current rating	10 A
Voltage rating	250 VAC
Insulator resistance	100 MΩ min.
Dielectrical withstanding	2000 VAC for 1 min
Operation temperature	-25 °C to +85 °C
Soldering	Lead free soldering process
Safety approvals available, certificates on request	



### Mating parts series

### Mechanical dimensions

Unit: mm

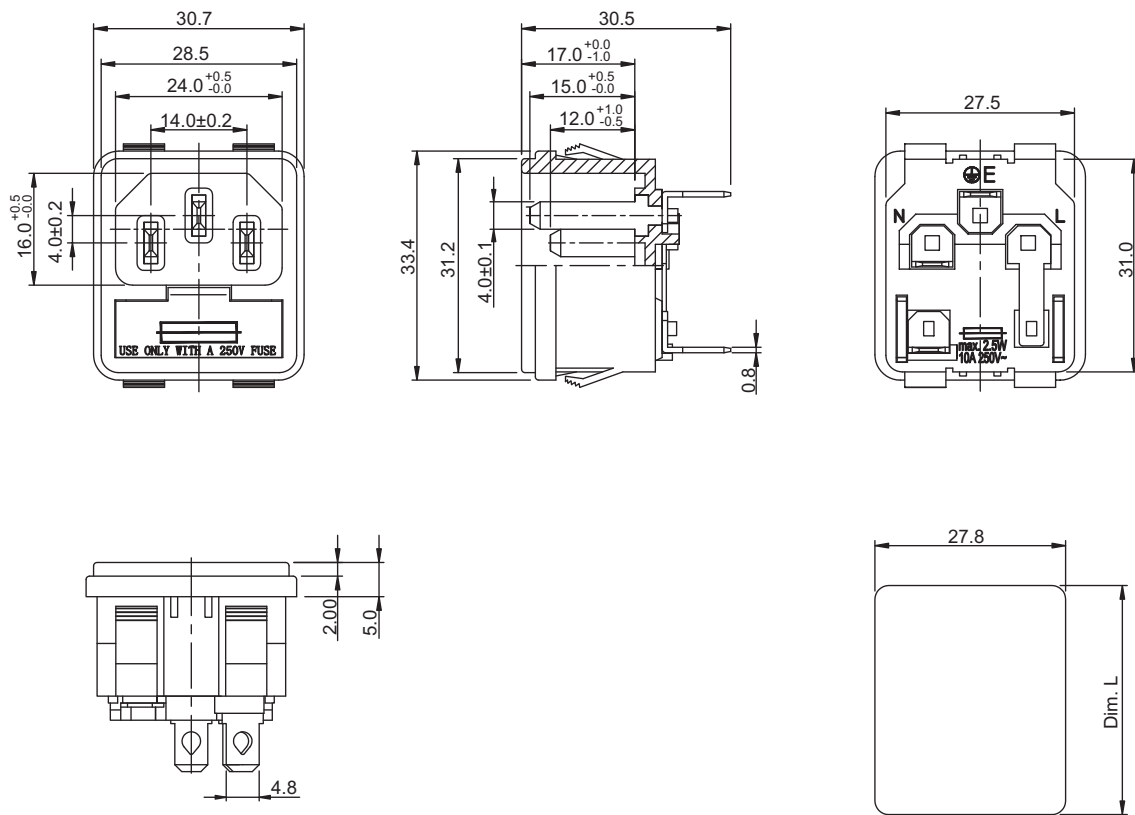

Panel cut-out for panel thickness with Dim. A

Ordercode dimensions		
Index	Dim. A	Dim. L
15	1.50	32.20
20	2.00	32.40
25	2.50	32.60
30	3.00	32.80

Tolerances	
Linear	XX.XX ± 0.20 X.XX ± 0.10

### Part numbering guide

5974 A

Series

15

Panel thickness index  
see table

V0

Material  
V0 = UL94V-0  
V1 = UL94V-1  
V2 = UL94V-2

\* standard

